

09/07/00
JC490 U.S. PTO
09/657388

**UTILITY PATENT
APPLICATION TRANSMITTAL**

(Only for new nonprovisional applications
under 37 CFR 1.53(b))

Attorney Docket No. **001162** Total Pages

First Named Inventor or Application Identifier

**Yasuyuki NAKAJIMA, Hiromasa YANAGIHARA,
Akio YONEYAMA and Masaru SUGANO**

Check Box, if applicable [] Duplicate

Express Mail Label No.

**APPLICATION ELEMENTS FOR: APPARATUS AND
METHOD FOR COMPRESSION-TRANSMITTING AND
DECODING PICTURE INFORMATION AND STORAGE
MEDIUM STORED ITS CONTROL PROGRAMS**

**ADDRESS TO: Director of Patents and Trademarks
BOX PATENT APPLICATIONS
Washington, D.C. 20231**

1. ☒ Fee Transmittal Form (Incorporated within this form)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification Total Pages [70]
3. ☒ Drawing(s) (35 USC 113) Total Sheets [29]
4. ☒ Oath or Declaration Total Pages [2]
 - a. ☒ Newly executed (original)
 - b. ☐ Copy from prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed).
 - i. ☐ Deletion of Inventor(s)
Signed statement attached deleting inventor(s) named in prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by reference (useable if box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby
incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement Verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet and document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney

**UTILITY PATENT
APPLICATION TRANSMITTAL**

(Only for new nonprovisional applications
under 37 CFR 1.53(b))

Attorney Docket No.

001162

First Named Inventor or Application Identifier

**Yasuyuki NAKAJIMA, Hiromasa YANAGIHARA,
Akio YONEYAMA and Masaru SUGANO**

PAGE 2 OF 3

10. ☐ English translation Document (if applicable)

11. ☐ Information Disclosure Statement ☐ Copy of IDS Citation

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)

14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application
Status still proper and desired.

15. ☒ Claim for Convention Priority ☒ [2] Certified copies of Priority Documents

a. Priority of _____ application no. _____ filed on _____ is claimed under 35 USC 119.
The certified copies/copy have/has been filed in prior application Serial No. _____.
(For Continuing Applications, if applicable).

16. ☐ Other _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Division ☐ Continuation-in-part (CIP) of prior application no. ____/____

FEE TRANSMITTAL	Number Filed	Number Extra	Rate	Basic Fee
The filing fee is calculated below				\$690.00
Total Claims	33 - 20	13	x \$18.00	\$ 234.00
Independent Claims	13 - 3	10	x \$78.00	\$ 780.00
Multiple Dependent Claims			\$260.00	
Basic Filing Fee				\$1704.00
Reduction by 1/2 for small entity				
Fee for recording enclosed Assignment			\$40.00	\$ 40.00
TOTAL				\$1744.00

**UTILITY PATENT
APPLICATION TRANSMITTAL**

(Only for new nonprovisional applications
under 37 CFR 1.53(b))

Attorney Docket No.

001162

First Named Inventor or Application Identifier

**Yasuyuki NAKAJIMA, Hiromasa YANAGIHARA,
Akio YONEYAMA and Masaru SUGANO**

PAGE 3 OF 3

☒ [XX] A check in the amount of \$1744.00 is enclosed to cover the filing fee of \$1704.00 and the assignment recordation fee of \$40.00.

☐ [] Please charge our Deposit Account No. **01-2340** in the total amount of _____ to cover the filing fee and the _____ assignment recordation fee. A duplicate of this sheet is attached.

☒ [XX] The Commissioner is hereby authorized to charge payment for any additional filing fees required under 37 CFR 1.16 or credit any overpayment to Deposit Account No. **01-2340**. A duplicate of this sheet is attached.


18. CORRESPONDENCE ADDRESS

**ARMSTRONG, WESTERMAN, HATTORI
McLELAND & NAUGHTON
1725 K Street, N.W. Suite 1000
Washington, D.C. 20006
Telephone: (202) 659-2930
Facsimile: (202) 887-0357**

SUBMITTED BY

Typed or Printed Name **Mel R. Quintos**

Reg. No. 31,898

Signature 

Date: September 7, 2000

MRQ/II

APPARATUS AND METHOD FOR COMPRESSION-TRANSMITTING AND
DECODING PICTURE INFORMATION AND STORAGE MEDIUM STORED ITS
CONTROL PROGRAMS

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an apparatus and a method for compression-transmitting picture information such as live picture information, a decoding apparatus for
10 reducing compressed video data decoding processing load and decoding picture information, and a storage medium stored a control program for controlling the real time compression-transmission of picture information and decoding the picture information.

15 Description of the Related Art

To compress picture information such as live picture information in a real time manner compression and to transmit the picture information on a computer network, there are roughly two conventional methods, i.e., a direct
20 transmission method and an FIFO (First-In-First-Out) method.

In case of the direct transmission method, bit strings having different sizes according to frames outputted by a live encoder are outputted to a network as they are. In
25 that case, even if the transmission bit rate of data transmitted for one second is constant, a momentary transmission bit rate greatly varies depending on properties

such as encode modes and the motions of pictures. Due to this, burst data temporarily occupies a network band, with the result that packet collision and packet loss tend to occur and transmission efficiency thereby deteriorates. If
5 there is little room for an empty band of the network relative to an average stream transmission band, in particular, the deterioration of transmission efficiency is more conspicuous.

The direct transmission method will be described in
10 more detail with reference to Fig. 25. A picture signal inputted from a camera 10 is encoded in frame units (e.g., at intervals of about 1/30 seconds) by a real time encoder 11 which encodes data in real-time, and written into a frame buffer 12. Next, frame data having difference sizes
15 according to frames is outputted altogether to a network 16 at the best efforts by a network transmission section 15a, and fed to clients 171 to 17m connected to the network. In that case, the momentary transmission bit rate of the K-th frame ($R_{no-control-K}$) is a gradient of a waveform W_{10}
20 shown in Fig. 26 and obtained from the following formula (1):

$$R_{no-control-K} = BK / TSK \text{ [bit/sec]} > RS \quad (1)$$

Here, TSK: transmission time for transmitting K-th frame data to network,

25 BK: quantity of the K-th frame data accumulated in frame buffer, and

$R_{no-control-K}$: network transmission bit rate for

K-the frame.

Since this momentary transmission bit rate ($R_{no-control-K}$) is far higher than an average bit stream rate (R_S), chance of transmitting burst packet data is increased, resulting in the deterioration of transmission efficiency. In Fig. 26, TFK is a frame distance between the K -th frame and the $(K+1)$ th frame and TWK is a time for which the encoder 11 writes the K -th frame data into the frame buffer 12.

In case of the FIFO method, bit strings having different sizes according to frames outputted from the live encoder are sequentially written into an FIFO and stream data read from the FIFO at a constant speed using a process different from the encoder process is outputted to the network. The FIFO method will be described in more detail with reference to Fig. 27. A picture signal inputted from the camera 10 is encoded in frame units (e.g., at intervals of about 1/30 seconds) by a real time encoder 11 and sequentially written into an FIFO 12a. Next, the data read from the FIFO 12a at a constant speed by a network transmission section 15a is outputted to a network 16 at a constant rate and fed to clients 17_1 to 17_m connected to the network. A momentary transmission bit rate (R_{FIFO}) in that case is a gradient of a waveform $W1$ shown in Fig. 28 and equal to an average stream bit rate (R_S) as shown in a formula (2) below:

$$R_{FIFO} = R_S \text{ [bit/sec]} \quad (2)$$

Here, R_S : average stream bit rate; and

R_{FIFO} : transmission bit rate for transmission to

network.

Due to this, it is possible to avoid the burst transmission of packets and to transmit data efficiently.

However, if the above-described picture information transmission means is used, an FIFO requiring overflow and underflow control is necessary and it is also necessary to start another process for network output, thereby disadvantageously complicating packaging compared with the direct transmission method.

Next, a conventional decoding apparatus for decoding a compressed video data is shown in Fig. 29. In Fig. 29, compressed video data is inputted into a variable length decoder 51 and subjected to variable length decoding. Decoded quantization coefficients a , i.e., quantization discrete cosine transform coefficients are inputted into an inverse quantizer 52, and decoded motion vector information b is inputted into a motion compensation predictor 57. The quantization coefficients a are dequantized by the inverse quantizer 52 and discrete cosine transform coefficients $F(u, v)$ are inputted into an inverse discrete cosine transformer 60. The motion compensation predictor 57 extracts predictive picture data for using prediction from the pictures stored in a frame memory 58 using the motion vector information b .

Encode mode information c decoded by the variable length decoder 51 controls switching means 59. If the encode mode is an intra-plane encode mode, the switching means 59 is

turned off and nothing is added to outputs $f(x, y)$ from the inverse discrete cosine transformer 60 by an adder 56. Therefore, the outputs are outputted as decoded picture outputs $r(x, y)$ as they are and also stored in the frame memory 58.

On the other hand, if the encode mode is a mode other than the intra-plane encode mode, the switching means 59 is turned on, the outputs $f(x, y)$ from the inverse discrete cosine transformer 60 are added to motion compensation predictive pictures $c(x, y)$ by the adder 56 and the outputs are outputted as decoded picture outputs $r(x, y)$ and also stored in the frame memory 58.

In a compressed video data decoding processing, inverse discrete cosine transform has the largest processing load. Due to this, such a high-speed inverse discrete cosine transform algorithm as described in B. G. Lee, "A new algorithm to compute the discrete cosine transform", IEEE Trans. Acoust., Speech, and Signal Processing, vol. ASSP-32, pp. 1243-1245, Dec. 1984 is employed.

If a higher processing is required, a method of reducing a decoding processing by thinning out the number of decoded picture planes is employed. For example, a method in which only pictures which have been subjected to intra-plane encoding (intra encoding) are decoded and pictures encoded in modes other than the intra-plane encode mode are not decoded, is employed.

However, if a decoding processing is conducted by a

software using, for example, a personal computer and the processing performance of the personal computer is low, even such a high processing is insufficient, thereby disadvantageously causing a disadvantage that the number
5 of played back pictures planes greatly decreases.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a real-time picture information compression-transmission
10 apparatus, a method thereof as well as a storage medium stored a control program for real-time picture information compression control capable of efficiently transmitting picture information in a real time manner without employing FIFO requiring overflow and underflow control, without
15 starting a process exclusive to network output while suppressing the generation of packet loss to be low.

It is another object of the present invention to provide an compressed video data decoding apparatus capable of ensuring a higher processing speed than a conventional
20 processing speed. It is yet another object of the present invention to provide a compressed video data decoding apparatus capable of greatly reducing compressed video data decoding load without causing so great deterioration in picture quality and decrease in the number of played back
25 picture planes when playing back a picture.

The present invention has the following characteristics: the present invention comprises input

means for receiving said picture information; an encoder
encoding said picture information from the input means on
a preset cycle in a real time manner; storage means for writing
and storing real-time-encoded frame data on said picture
5 information from the encoder for each frame; division means
for sequentially dividing said real-time-encoded frame data
stored in the storage means into packets for each frame;
and transmission timing control and transmission means for
controlling transmission timing to sequentially transmit
10 the divided packets to a network after a write time for storing
said frame data for the packets and before a time for storing
next frame data, and for transmitting the packets to the
network according to a connection-less type protocol.

Further, the present invention can be constituted to
15 include a packet transmission timing adjustment section,
a packet loss detection section and transmission timing fine
adjustment parameter generation section, and a packet loss
detection and bit rate feedback section. A transmission
packet division section divides bit string data in a frame
20 buffer in which frame data output from a real time encoder
encoding picture information to frame data in a real time
manner is written and stored for each frame, into packets
of packet size suited for an MTU (Maximum Transmission Unit:
Ethernet maximum transfer unit). The packet transmission
25 timing adjustment section adjusts transmission timing for
transmitting the packets divided by the transmission packet
division section, i.e., adjusts transmission timing so as

to transmit the packets after a write time for storing the frame data and before a time for storing the next frame data, thereby outputting the packets to the network while suppressing burst transmission of packets. A network
5 output processing is conducted in an encoder processing loop without starting an exclusive process. The packet loss detection and transmission timing fine adjustment parameter generation section monitors the packets of each channel outputted to the network, and conducts feedback control for
10 issuing a timing fine adjustment command to the packet transmission timing adjustment section if packet loss occurs. The packet loss detection and bit rate feedback section monitors the packets of each channel outputted to the network, and conducts feedback control by requesting the real time
15 encoder to decrease bit rate if packet loss occurs.

The present invention comprises means for converting an inversely-quantized discrete cosine transform coefficient into a smaller base than an encoding-side discrete cosine transform base; means for performing inverse
20 transform using inverse discrete cosine transform using the smaller base than the encoding-side discrete cosine transform base; and means for converting picture data subjected to the inverse discrete cosine transform into picture data having a same size as a size of a compressed
25 video data.

The present invention also comprises means for low-pass filtering an inversely quantized discrete cosine transform

coefficient; and means for inversely transforming the low-pass filtered data using an inverse discrete cosine transform having a base of a same size as a size of an encoding-side discrete cosine transform base, wherein the
5 inverse discrete cosine transform is to inversely transform a non-zero discrete cosine transform coefficient.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a transmission control block diagram in the
10 first embodiment according to the present invention;

Fig. 2 is a signal frame view for explaining the division of frame data into UDP packets in the first embodiment according to the present invention;

Fig. 3 is a time chart for describing a frame buffer
15 storage concept in the first embodiment according to the present invention;

Fig. 4 is a flow chart showing the operation of a transmission control section in the first embodiment according to the present invention;

20 Fig. 5 is a block diagram for describing filtering in the second embodiment according to the present invention;

Fig. 6 is a block diagram for describing bit rate feedback control in the third embodiment according to the present invention;

25 Fig. 7 is a block diagram for describing a serial number adding operation in the third embodiment according to the present invention;

Fig. 8 is a block diagram for describing fine adjustment feedback control over transmission timing for a plurality of channels in the fourth embodiment according to the present invention;

5 Fig. 9 is a flow chart for describing the operation of a transmission control section in the fourth embodiment according to the present invention;

Fig. 10 is a flow chart for describing the operation of a packet loss detection and transmission timing fine adjustment parameter generation section in the fourth embodiment according to the present invention;

Fig. 11 is a time chart for describing packet transmission timing fine adjustment parameters SJ ($1 \leq J \leq N$, where N is total channel number) in the fourth embodiment according to the present invention;

Fig. 12 is a block diagram showing a constitution of computer performing of the first to twelfth embodiment according to the present invention;

Fig. 13 is a block diagram showing the constitution of the fifth embodiment according to the present invention;

Fig. 14 is a block diagram showing the constitution of the sixth embodiment according to the present invention;

Fig. 15 is an explanatory view showing one example of high-speed inverse discrete cosine transform using butterfly operation;

Fig. 16 is an explanatory view for the butterfly operation applied to the sixth embodiment according to the

present invention;

Fig. 17 is a block diagram showing the constitution of the seventh embodiment according to the present invention;

Fig. 18 is a block diagram showing the constitution of the eighth embodiment according to the present invention;

Fig. 19 is a block diagram showing the constitution of the ninth embodiment according to the present invention;

Fig. 20 is a block diagram showing the constitution of the tenth embodiment according to the present invention;

Fig. 21 is a block diagram showing the constitution of the eleventh embodiment according to the present invention;

Fig. 22 is a block diagram showing the constitution of the twelfth embodiment according to the present invention;

Fig. 23 shows mathematical formulas;

Fig. 24 shows the outline of a program stored on a storage medium;

Fig. 25 is a block diagram showing an example of a conventional transmission apparatus based on a direct transmission method;

Fig. 26 is a time chart for describing a frame buffer storage concept in the conventional transmission apparatus based on the direct transmission method;

Fig. 27 is a block diagram showing an example of a conventional transmission apparatus based on an FIFO method;

Fig. 28 is a time chart for describing a frame buffer storage concept in the conventional transmission apparatus

based on the FIFO method; and

Fig. 29 is a block diagram showing the constitution of a conventional decoding apparatus.

5 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention will be described in detail with reference to the accompanying drawings.

Description will be given, as the first embodiment, to a method of efficiently transmitting live picture
10 information by transmission control while applying a connection-less type protocol, e.g., UDP (User Datagram Protocol) to a transport protocol. Fig. 1 is a block diagram for describing the interior of a transmission control section
15 in case of efficiently transmitting live picture information by transmission control. A picture signal inputted from a camera 10 is encoded in frame units (e.g., at intervals of about 1/30 seconds) by a real time encoder 11 which encodes data in a real time manner, and written into a frame buffer 12. Next, frame data having different
20 sizes according to frames is fed to a transmission packet division section 13. In consideration of transmission efficiency and packet transmission on a network which does not permit IP (Internet Protocol) fragmentation, the transmission packet division section 13 divides the frame
25 data into packets of UDP payload size which can prevent the occurrence IP fragmentation and can make overhead by each of headers for the Ethernet, the IP and UDP the smallest.

Specifically, as shown in Fig. 2, the frame data is divided into packets of such size as to be suited for the Ethernet maximum transfer unit (MTU). To calculate a UDP payload size (UDP_PSIZE), the following formula (3) is used:

5
$$\text{UDP_PSIZE} = \text{MTU_SIZE} - \text{IP_HEADER_SIZE} - \text{UDP_HEADER_SIZE} \quad (3)$$

Here, UDP_PSIZE : payload size of UDP packet to be transmitted (unit: byte),

 MTU_SIZE: Ethernet maximum transfer unit (usually
10 1500 bytes),

 IP_HEADER_SIZE: IP header size (20 bytes if no option is added), and

 UDP_HEADER_SIZE: UDP header size (usually 8 bytes).

Also, the number (CK) of UDP packets divided from the
15 K-th frame data (BK bytes) is calculated by the following formula (4). In the formula (4), it is assumed to reckon decimals as a unit.

$$\text{CK} = \text{BK} / \text{UDP_PSIZE} \quad (4)$$

Here, CK: number of UDP packets divided from K-th frame,

20 BK: data size of K-th frame (unit: byte),

 UDP_PSIZE: payload size of UDP packet to be transmitted (unit: byte).

The packet transmission timing adjustment section 14 will be described, referring again to Fig. 1. The K-th frame
25 data which has been divided into CK packets by the transmission packet division section 13 is transmitted to the network 16 by the packet transmission timing adjustment

section 14 by the time the real time encoder 11 outputs the (K+1)th frame data to the frame buffer 12, and fed to receiver clients 17l to 17m.

The transmission timing of each of the CK UDP packets will be described with reference to Fig. 3. Assuming that a frame distance between the K-th frame and the (K + 1)th frame is TFK and time for which the real time encoder writes the K-th frame data into the frame buffer is TWK, time TSK for which the K-th frame data can be transmitted to the network is as shown in the following formula (5):

$$TSK = TFK - TWK \quad (5)$$

Here, TSK: transmission time [sec.] for transmitting K-th frame data to network,

TFK: frame distance [sec.] between K-th frame and (K + 1)th frame, and

TWK: time [sec.] for which encoder writes K-th frame data into frame buffer.

According to the present invention, the CK UDP packets are transmitted for time TSK while arranging the packets equidistantly. In that case, the transmission bit rate (R control-K) of the K-th frame is a gradient of a waveform W12 shown in Fig. 3 and calculated from a formula (6). Compared with the conventional direct transmission method, the transmission bit rate of each frame is close to the average stream bit rate as shown in a formula (7), so that burst transmission can be avoided.

$$R \text{ control-K} = BK / TSK \text{ [bit/sec]} \quad (6)$$

$$R_{\text{no-control-K}} > B_{\text{control-K}} > R_s \quad (7)$$

Here, B_K : quantity of K-th frame data accumulated in frame buffer,

$R_{\text{control-K}}$: transmission bit rate for transmitting
5 K-th frame to network according to the present invention,

$R_{\text{no-control-K}}$: transmission bit rate for transmitting K-th frame to network according to direct transmission method shown in Fig. 14, and

R_s : average stream bit rate.

10 The operation of the packet transmission timing adjustment section 14 shown in Fig. 1 will be described in detail with reference to the transmission control section flow chart of Fig. 4. First, an initial value 1 is substituted for the frame number K in a step S10. The K-th
15 frame data inputted in a step S11 is divided into CK pieces of data calculated from the formula (4) in a step S12. The divided data are defined as $(D_1, D_2, D_3, \dots, D_{CK})$, respectively. Next, in a step S14, a UDP packet with the leading data D_1 thus divided used as a payload is transmitted.
20 At this moment, transmission time is substituted for packet transmission start time T_R in a step S13. Next, it is determined whether or not the difference between the present time T_N substituted in a step S15 and the packet transmission start time T_R becomes not less than T_{SK}/CK based on a
25 determination formula (formula (8)) in a step S16. If a determination result is NO, time does not reach packet transmission timing and the steps S15 and S16 are repeated.

If the determination result is YES, time reaches the transmission timing and a step S17 follows. If there is divided data which has not been transmitted yet in the frame, the next data (D2 in this case) is transmitted in packets.
5 This operation is repeated up to the data DCK. When there is no divided data which has not been transmitted in a step S17, the numbers of frames waiting to be received are increased by "1" in a step S18 and the processing is moved to waiting for the reception of the next frame data (the step S11).

10
$$TN - TR \geq TSK / CK \text{ [sec]} \cdots (8)$$

Here, TN: present time,

TR: packet transmission start time,

CK: number of UDP packets divided from K-th frame,

and

15 TSK: transmission time [sec] for which K-th frame data is transmitted to network.

As described above, according to the first embodiment, the transmission control section 15 does not transmit data to the network for a time for which the real time encoder
20 11 writes the data into the frame buffer 12. Due to this, it is possible to incorporate a network output processing into the processing loop of the real time encoder 11. As a result, compared with the conventional method in which FIFO is used and another process for network output is started,
25 it is possible to realize a network output processing with simple packaging. Furthermore, by extending the transmission time for transmitting frame data to the network

to a time at which the next frame is written into the buffer,
it is possible to avoid burst transmission of frame data
packets to the network compared with the conventional direct
transmission method and to thereby suppress the generation
5 of packet loss and to improve transmission efficiency.

Next, description will be given, as the second
embodiment, to a method capable of transmitting only filtered
picture information by filtering transmission packets using
UDP port numbers or IP multi cast addresses even if a network
10 band in the course of transmission becomes narrower, with
reference to Fig. 5. Since a transmission method for each
channel is the same, J channel ($1 \leq J \leq N$, where N is the
number of channels) representing channels will be described.
As in the case of the first embodiment, picture information
15 outputted from a camera 10J is real-time encoded by a real
time encoder 11J and written into a frame buffer 12J. Frame
data written in frame units (e.g., at intervals of about
1/30 seconds) is divided to be suited for MTU size by a
transmission packet division section 13J and the divided
20 transmission packets are sequentially transmitted to a
network 16 by a packet transmission timing adjustment section
14J while avoiding burst transmission.

All the data transmitted for the respective channels
are usually fed to receiver clients 17l to 17m through the
25 network 16. However, if the band of a network 19 after a
router (such as a remote access) 18 becomes narrower to make
it impossible for all the data on 1 to N channels to pass

through the band, then packet loss occurs to all channel data and no channel cannot be received by a reception client 20. To avoid such a potential disadvantage, individual port numbers are allotted to channel packets and the router (e.g., remote access) 18 makes filtering setting to pass through only a packet having a port number (in this case, the port number of the J channel ($1 \leq J \leq N$, where N is the number of channels)) wanted to be passed through the network band after the router (e.g., remote access) 18. By doing so, the receiver client 20 can normally receive designated channel data.

Instead of allotting the different port numbers to the channels, respectively, IP multi-cast addresses may be allotted to the respective channels. By doing so, only the channel data corresponding to the IP multi-cast address for which the reception client 20 issues a reception request (by an IGMP protocol Join message), can be passed through the router (e.g., remote access) 18 and the receiver client 20 can, therefore, normally receive designated channel data.

As stated above, according to the second embodiment, not only multi-channel transmission but also filtering is conducted using either the UDP port numbers or the IP multi-cast addresses, whereby it is possible to transmit only the filtered picture information even if the network band through which the data is transmitted is narrowed.

Next, description will be given to, as the third embodiment, a case of adding a packet loss detection function

and a bit rate feedback function, with reference to Fig. 6 showing bit rate feedback. As in the case of the first embodiment, a picture signal inputted from a camera 10 is encoded by a real time encoder 11 in frame units (e.g., at intervals of about 1/30 seconds) and written into a frame buffer 12. Next, each frame data read from the frame buffer 12 is divided into packets in `CHUNK_SIZE` shown in a formula (9) by a transmission packet division section 13 and serial numbers are added to the respective packets. A packet transmission timing adjustment section 14 transmits the packets to a network 16 while adjusting transmission timing. The transmitted data are received by receiver clients 17l to 17m through the network 16.

Here, the addition of serial numbers will be described with reference to Fig. 7 which shows a serial number addition function. A field for adding serial numbers 30 is provided in a UDP payload 31 and values increased by 1 from serial numbers for the respective packets are stored in the field. A field 32 in which divided frame data are stored decreases by an area of the serial numbers (to be referred to as "`SERIAL_SIZE`"). The size (`CHUNK_SIZE`) into which the frame data 33 is divided is expressed as shown in a formula (9) below while using `UDP_PSIZE` in the formula (3):

$$\text{CHUNK_SIZE} = \text{UDP_PSIZE} - \text{SERIAL_SIZE} \quad (9)$$

Here, `UDP_PSIZE`: payload size of UDP packet to be transmitted (unit: byte),

`SERIAL_SIZE`: size storing serial numbers (unit:

byte), and

CHUNK_SIZE: size into which the frame data is divided (unit: byte).

In addition, the number (CK) of UDP packets divided
5 from the K-th frame data (BK bytes) is calculated by a formula
(10). In the formula (10), it is assumed to reckon decimals
as a unit.

$$CK = BK / \text{CHUNK_SIZE} \quad (10)$$

Here, CK: number of UDP packets divided from K-th frame,
10 BK: data size of K-th frame (unit: byte), and
CHUNK_SIZE: size into which the frame data is divided
(unit: byte).

In Fig. 6, the packets transmitted to the network 16
are constantly monitored by a packet loss detection and bit
15 rate feedback section 21 in the transmission-side same
segment and a packet loss rate PLR is calculated by a formula
(11):

$$\text{PLR} = \text{PLN} / \text{PN} \quad (11)$$

Here, PLR: packet loss rate,

20 PLN: the number of packets lost for T seconds,
PN: total number of packets transmitted for T seconds,
and

T: time interval for measuring packet loss rate (unit:
second).

25 The packet loss detection is conducted by watching
whether the serial numbers (increased by one for the
respective packets) added to the packets which have been

sequentially monitored are arranged in order. If the serial numbers skip, it is recognized that packet loss occurs.

If the packet loss rate PLR exceeds a preset value L_{THB} ($0 \leq L_{THB} \leq 1$), it is judged that a present transmission
5 bit rate exceeds a transmittable network band level and a bit rate change request signal 22 requesting to decrease bit rate is transmitted to the real time encoder 11. The real time encoder 11 which has received the bit rate change request signal 22, changes the encoding bit rate to W -times
10 ($0 < W \leq 1$) of the present rate. By repeating the above-stated operations, data can be transmitted with the packet loss rate PLR of not more than the preset value L_{THB} .

According to the third embodiment described above, by
15 adding the packet loss detection and bit rate feedback functions and controlling the transmission bit rate in accordance with a network band, it is possible to avoid packet loss and ensure efficient transmission even if the network band is insufficient or the network band varies.

20 Next, description will be given, as the fourth embodiment, to a case of adding a packet loss detection function and a bit rate feedback function when transmitting multi-channel live pictures, with reference to Fig. 8 showing transmission timing fine adjustment feedback. Since each
25 channel operates in the same manner, a method of transmitting J channel ($1 \leq J \leq N$, where N is the number of channels) will be described to represent the channels. As in the case

of the third embodiment, a picture signal inputted from a camera 10J is encoded in frame units (e.g., at intervals of about 1/30 seconds) by a real time encoder 11J and written into a frame buffer 12J. Next, frame data read from the
5 frame buffer 12J is divided into packet of frame data division size (CHUNK_SIZE) as expressed by a formula (9) by an transmission packet division section 13J, serial numbers are added to the divided packets and the divided data are transmitted to a network 16 while a packet transmission
10 timing adjustment section 14J is adjusting transmission timing. The transmitted data are received by receiver clients (17l to 17m) through the network 16.

The packet loss rate PLRJ ($1 \leq J \leq N$, where N is total channel number) of each channel of the packet transmitted
15 to the network 16, which is constantly monitored by a packet loss detection and transmission timing fine adjustment parameter generation section 23, is calculated by a formula (12):

$$PLRJ = PLNJ / PNJ \quad (12)$$

20 Here, PLRJ: packet loss rate of J channel data,

PLNJ: the number of packets lost for T seconds with respect to J channel data,

PNJ: total number of packets transmitted for T seconds with respect to J channel data, and

25 T: time interval for measuring packet loss rate (unit: second).

The packet loss detection and timing fine adjustment

parameter generation section 23 determines packet transmission fine adjustment parameters SJ so that the sum of the packet loss rates PLRJ of the channels becomes a minimum while sequentially changing packet transmission fine adjustment parameters SJ (S1, S2, ..., SN, where N is total channel number, $1 \leq J \leq N$) fed back to the packet transmission timing adjustment section 14J according to the frame reception timing. The detail of changing SJ will be described later. This packet transmission fine adjustment parameters SJ are passed on to the packet transmission timing adjustment section 14J through a common memory 25 and used when fine-adjusting transmission timing.

The operation of the packet transmission timing adjustment section 14J will be described with reference to the flow chart of Fig. 9. First, an initial value 1 is substituted for frame number K in a step S20. The K-th frame data inputted in a step S21 is divided into CK pieces of data calculated from a formula (10) in a step S22. The divided data are defined as (D1, D2, D3, ..., DCK), respectively. Next, in a step S23, timing fine adjustment parameters SJ ($1 \leq J \leq N$, where N is the number of channels) for the J channel are read from the common memory. If a determination result in a step S24 shows that SJ is 0, a step S26 follows. If SJ is a value other than 0, a time weight of transmission delay SEND DELAYJ calculated by a formula (13) is added to thereby delay the transmission timing of J channel packets in a step S25 and the step S26

follows.

$$\text{SEND_DELAYJ} = \text{MTU_SIZE} * \text{SJ} * 8 / \text{BR_NET} \cdots (13)$$

Here, SEND_DELAYJ: J channel packet transmission delay
(unit: second),

5 MTU_SIZE: Ethernet maximum transfer unit, usually
1500 bytes,

 SJ: J channel timing fine adjustment parameters (SJ,
 $1 \leq J \leq N$, where N is the number of channels), and

 BR_NET: effective network band (unit: bit/sec).

10 Next, a UDP packet with a leading data D1 divided used
as a payload is transmitted in a step S27. At this moment,
transmission time is substituted for packet transmission
start time TR in the step S26. Next, it is determined whether
the difference between the present time TN substituted in
15 a step S28 and TR is not more than TSK / CK using the
determination formula (formula 8) in a step S29. If a
determination result is NO, time does not pass to reach packet
transmission timing and the steps S28 and S29 are, therefore,
repeated. If the determination result is YES, time already
20 passes to reach the packet transmission timing and a step
S30 follows. In the step S30, if there is divided data of
the frame which has not been transmitted yet, the next data
(D2 in this case) is transmitted in packets. These
operations are repeated up to the data DCK. When no divided
25 data which has not been transmitted is left in the step S30,
the frame number K waiting to be received is increased by
1 in a step S31, moving to a step of waiting for the reception

of the next frame data (in the step S21).

Next, a method of generating timing fine adjustment parameters SJ ($S1, S2, S3, \dots, SN$, where N is total channel number, $1 \leq J \leq N$) will be described with reference to the flow chart of Fig. 10. First, in a step S40, default values 0 are substituted for all timing fine adjustment parameters SJ ($S1, S2, S3, \dots, SN$, where N is total channel number, $1 \leq J \leq N$). Next, in a step S41, a packet loss rate $PLRJ$ (see the formula (12)) is calculated for each channel. In a step S42, it is determined whether or not the sum of packet loss rates of all the channels is equal to 0. If the sum is equal to 0, the steps S41 and S42 are repeated. If not equal to 0, a step S43 follows. In the step S43, the latest frame number (RCFN) of reference channel data received as an initial value is substituted for the frame number K of a reference channel corresponding to frame timing at which the next packet loss rate is to be measured. The channel having the lowest frame rate (frames/sec) among the 1 to N channels is selected as the reference channel. In a step S44, all combinations of the timing fine adjustment parameters SJ ($S1, S2, S3, \dots, SN$, where N is total channel number, $1 \leq J \leq N$) are changed one by one in a range of $0 \leq SJ < M$, to thereby form a processing loop for executing steps S44, S45, S46, S47, S48 and S49. Here, M represents an upper limit of the packet transmission timing fine adjustment parameter SJ ($S1, S2, S3, \dots, SN$, where N is total channel number, $1 \leq J \leq N$), and is deduced from a formula

(14) while decimals are discarded to provide an integer not lower than 0. The packet transmission timing fine adjustment parameter SJ indicate by how many packets the packet transmission timing is delayed. Fig. 11 showing the
 5 packet transmission timing fine adjustment parameters SJ ($1 \leq J \leq N$, where N is total channel number) indicates that transmission timing of a packet transmitted at a time P10 (while SJ is 0) is delayed up to a time P11 (where SJ is M-1).

10
$$M = (\text{CHUNK_SIZE} * 8 / (\text{BR_STREAM_TOTAL} / N) / (\text{MTU_SIZE} * 8 / \text{BR_NET}) \cdots (14)$$

Here, M: upper limit of packet transmission timing fine adjustment parameter SJ (S1, S2, S3, ..., SN, where N is total channel number, $1 \leq J \leq N$),

15 CHUNK_SIZE : sizes into which frame data is divided (unit: byte),

BR_STREAM_TOTAL : total bit rate of 1 to N channels,

N: number of channels,

MTU_SIZE : Ethernet maximum transfer unit, usually
 20 1500 bytes,

BR_NET : execute bit rate of network

$(\text{BR_STREAM_TOTAL} / N)$: average bit rate per channel,

$(\text{CHUNK_SIZE} * 8 / (\text{BR_STREAM_TOTAL} / N))$: average packet transmission interval per channel (unit: second), and

25 $(\text{MTU_SIZE} * 8 / \text{BR_NET})$: time required to transmit MTU.

A weight continues to be given until the latest frame number (RCFN) of the received reference channel data becomes

not less than K in the step S45 of Fig. 10. When the number becomes not less than K, the value of K is increased by 1 in the step S46. This indicates that the loop processing of the steps S44 to S49 is performed once for each frame of the reference channel. The loop processing of the steps S44 to S49 is completed at a timing when the sum of packet loss rates of all channels calculated in the step S48 using the packet loss rate PLR_J ($1 \leq J \leq N$, where N is total channel number) for each channel calculated in the step S47 becomes equal to 0, or when the loop processing is executed for all combinations in the step S49. The parameters S_J are changed in the order of $(S_1, S_2, S_3, \dots, S_N) = (0, 0, \dots, 0) \rightarrow (1, 0, \dots, 0) \rightarrow (1, 1, \dots, 0) \rightarrow (1, 1, \dots, 1) \rightarrow (2, 1, \dots, 1) \rightarrow (2, 2, \dots, 1) \rightarrow (2, 2, \dots, 2) \rightarrow (M-1, M-2, \dots, M-2) \rightarrow (M-1, M-1, \dots, M-1)$, thereby executing M^N combinations. If the loop processing is completed in the step S48, the timing fine adjustment parameters S_J ($S_1, S_2, S_3, \dots, S_N$, where N is all channel number, $1 \leq J \leq N$) at that time are written into the common memory from which the parameters can be read out by the packet transmission timing adjustment sections for the respective channels in a step S51, and the processing returns to the step S41. If the loop processing is completed in the step S49, timing fine adjustment parameters S_J ($S_1, S_2, S_3, \dots, S_N$, where N is total channel number, $1 \leq J \leq N$) which make the sum of packet loss rates of the respective channels a minimum are written into the common memory in the step S50, and the processing returns

to the step S41.

As stated so far, according to the fourth embodiment, if the packet loss detection and the packet transmission timing fine adjustment are conducted for each channel when
5 transmitting a multi-channel live picture, it is possible to suppress the generation of packet loss and to improve transmission efficiency at the time of transmitting multi-channel live picture information.

While the first to fourth embodiments of the present
10 invention have been described so far in detail with reference to the drawings, it is obvious that specific examples of constitution should not be limited to these first to fourth embodiments and that any changes in design within the range of the scope of the invention are contained in the range
15 of the technical concept of the present invention.

In case of the above-described first to fourth embodiments, for example, a transmission control program is recorded on a computer readable storage medium 200 shown in Fig. 12 and the transmission control program recorded
20 on the storage medium 200 are read by a computer 100 shown in Fig. 12 to allow executing desired transmission control. Here, the transmission control program is control procedures for executing the functions of the transmission control section 15 shown in Figs. 1, 5, 6 and 8.

25 The computer 100 shown in Fig. 12 consists of a CPU 101 executing the above-stated transmission control program, an input device 102 such as a keyboard or a mouse, an ROM

(Read-Only Memory) 103 recording various data, an RAM (Random-Access Memory) 104 recording operation parameters and the like, a reader 105 reading transmission program from the storage medium 200, an output device 106 such as a display or a printer, and a bus BUS connecting the respective elements of the apparatus.

The CPU 101 reads the transmission control program recorded on the storage medium 200 through the reader 105 and then executes the transmission control program, thereby making it possible to conduct the above-described transmission control program.

Here, the storage medium 200 involves not only recording mediums of various portable types such as an optical disk, a floppy disk, a hard disk and the like, but also recording mediums temporarily storing and holding data in a transmission medium such as a network.

In a transmission simulation experiment while using ITU-TH. 263-base live picture information, if picture information of 512Kbps was transmitted with a network use rate of 60% on a 10Mbps, 10 Base-T LAN, the packet loss rate of the method and apparatus according to the present invention was reduced to 0.0% from the packet loss rate of the conventional method of 0.20%. If picture information of 100Kbps was transmitted on the same conditions, the packet loss of the method and apparatus according to the present invention was reduced to 0.0% from the packet loss rate of the conventional method of 0.32%. If picture information

of 512Kbps was transmitted with a network use rate of 70%,
the packet loss rate of the method and apparatus according
to the present invention was 0.28% compared with that of
the conventional method of 0.68%. If picture information
5 of 100Kbps was transmitted on the same conditions, the packet
loss of the method and apparatus according to the present
invention was reduced to 0.03% from the packet loss rate
of the conventional method of 0.19%.

Next, the fifth embodiment of the present invention
10 will be described with reference to the block diagram of
Fig. 13. It is noted that Fig. 13 shows one example of the
internal constitution of the receiver client shown in Fig.
1. The same reference symbols as those in Fig. 29 denote
the same or equivalent constituent elements. In this
15 embodiment, data is subjected to inverse discrete cosine
transform at a decoding side while using a smaller base than
that of the discrete cosine transform at an encoding side.

Compressed video data is inputted into a variable length
decoder 51. The variable length decoder 51 decodes
20 quantization discrete cosine transform coefficients a,
motion vector information b, encode mode information c and
the like. The quantization discrete cosine transform
coefficients a thus decoded are inputted into an inverse
quantizer 52, the motion vector information b is inputted
25 into a motion compensation predictor 57 and the encode mode
information c controls switching means 59 to be described
later.

The quantization discrete cosine transform coefficients a inputted into the inverse quantizer 52 are dequantized and discrete cosine transform coefficients $F(u, v)$ are outputted. The discrete cosine transform coefficients $F(u, v)$ are inputted into a scaling unit 53, which unit scales coefficient data. To conduct scaling, each discrete cosine transform coefficient is changed according to a formula given as a formula (15) in Fig. 23.

In the formula, $F(u, v)$ and $F'(u, v)$ are discrete cosine transform coefficients inputted into the scaling unit 53 and discrete cosine transform coefficients which have been scaled, respectively. Also, $M \times N$ (where N is a positive even number) is the base size of encoding-side discrete cosine transform, u and v are coordinates of the discrete cosine transform coefficients in horizontal and vertical directions, respectively, where $u = 0, 1, \dots, (N/2^{p1}-1)$ and $v = 0, 1, \dots, (N/2^{p2}-1)$, respectively. Symbols $p1$ and $p2$ are parameters (integers) for determining the base size of the small-base inverse discrete cosine transform in horizontal and vertical directions, respectively, where the base size is $N/2^{p1}$ and $N/2^{p2}$ in horizontal and vertical directions, respectively. For example, at $p1 = p2 = 1$, base size is $N/2 \times N/2$.

Further, for simplifying the process, scaling as shown in the following formula (16) can be utilized:

$$F'(u, v) = F(u, v) / \{(2^{p1/2}) \times (2^{p2/2})\} \quad (16)$$

The discrete cosine transform coefficients $F'(u, v)$

subjected to scaling are inputted into a small-base inverse discrete cosine transformer 54. In the small-base inverse discrete cosine transformer 54, the discrete cosine transform coefficients $F'(u, v)$ are inversely transformed
 5 by inverse discrete cosine transform of a smaller base of basesize $N/2^{p1}$ and $N/2^{p2}$ in horizontal and vertical directions, respectively, than that of the conventional transform, and pictures $f'(i, j)$ are outputted.

The pictures $f'(i, j)$ are inputted into a resolution
 10 converter 55 in which the resolution of the picture is converted into a spatial resolution of a picture in same size at the encoding side and outputted as $f(x, y)$. To convert spatial resolution from resolution of $f'(i, j)$ to that of $f(x, y)$, an interpolation method or a simple
 15 interpolation method can be utilized.

At $p1 = p2 = 1$, for example, the following conversion can be made according to the interpolation method as shown in formulas (17) to (20):

$$f(x, y) = f(2i, 2j) = f'(i, j) \cdots (17)$$

$$20 \quad f(x, y) = f(2i+1, 2j) = (f'(i, j) + f'(i+1, j)) / 2 \cdots (18)$$

$$f(x, y) = f(2i, 2j+1) = (f'(i, j) + f'(i, j+1)) / 2 \cdots (19)$$

$$25 \quad f(x, y) = f(2i+1, 2j+1) = (f'(i, j) + f'(i+1, j) + f'(i, j+1) + f'(i+1, j+1)) / 4 \cdots (20)$$

where $x, y = 0, 1, 2, \cdots, N-1$.

In addition, the following conversion can be made

according to the simple interpolation method as shown in formulas (21) to (24):

$$f(x, y) = f(2i, 2j) = f'(i, j) \cdots (21)$$

$$f(x, y) = f(2i+1, 2j) = f'(i, j) \cdots (22)$$

5 $f(x, y) = f(2i, 2j+1) = f'(i, j) \cdots (23)$

$$f(x, y) = f(2i+1, 2j+1) = f'(i, j) \cdots (24)$$

Meanwhile, the motion vector information b decoded by the variable length decoder 51 is inputted into the motion compensation predictor 57. The motion compensation predictor 57 loads corresponding picture information from the frame memory 58 in accordance with the inputted motion vector information b and outputs a motion compensation predictive picture $c(x, y)$.

Further, the encode mode information c decoded by the variable length decoder 51 controls the switching means 59. If the encode mode is an intra-plane encode mode, the switching means 59 is turned off, nothing is added to the outputs $f(x, y)$ from the resolution converter 55 by an adder 56, and the outputs $r(x, y)$ are outputted as they are and stored in the frame memory 58 at the same time.

Meanwhile, if the encode mode is a mode other than the intra-plane encode mode, the switching means 59 is turned on, and the motion compensation predictive picture $c(x, y)$ is added to the outputs $f(x, y)$ from the resolution converter 55 by the adder 56 and the results are outputted as decoded picture outputs $r(x, y)$ and stored in the frame memory 58 at the same time.

As stated above, according to this embodiment, the small-base inverse discrete cosine transformer 54 performs inverse discrete cosine transform using the base size of $N/2^{p1}$ and $N/2^{p2}$ in horizontal and vertical directions, respectively, scaled by the scaling unit 53. Thus, it is possible to greatly improve a processing speed compared with the conventional speed.

Next, the sixth embodiment of the present invention will be described with reference to Fig. 14. In this embodiment, data is decoded using a low-pass filter processing and a non-zero coefficient inverse discrete cosine transform processing.

Compressed video data is first inputted into a variable length decoder 51. Since the operation of the variable length decoder 51 and that of an inverse quantizer 52 are the same as or equivalent to those in the preceding fifth embodiment, no description will be given thereto. Discrete cosine transform coefficients $F(u, v)$ outputted from the inverse quantizer 52 are inputted into a low-pass filter 61, which filter filters coefficient data.

Filtering can be realized by leaving only low range coefficients among the discrete cosine transform coefficients $F(u, v)$ of $N \times N$ in size. If it is assumed that coefficients which have been subjected to low-pass filtering are $F'(u, v)$, it is possible to utilize filtering as shown in the following formulas (25) and (26):

At $0 \leq u \leq b1$ and $0 \leq v \leq b2$, $F'(u, v) = F(u, v) \cdots$

(25)

At $u > b_1$ or $v > b_2$, $F'(u, v) = 0 \dots$ (26)

In the formulas, $u, v = 0, 1, 2, \dots, N-1$. Symbols b_1 and b_2 are filtering parameters which are integers equal to or lower than N .

Also, it is possible to use the following formulas (27) and (28) to carry out filtering:

At $b_2 u + b_1 v \leq b_1 b_2$,

$F'(u, v) = F(u, v) \dots$ (27)

At $b_2 u + b_1 v > b_1 b_2$,

$F'(u, v) = 0 \dots$ (28)

The discrete cosine transform coefficients $F'(u, v)$ which have been subjected to low-pass filtering are inputted into a non-zero coefficient inverse discrete cosine transformer 62 having the base of the same size as that of the encoding-side base. The non-zero coefficient inverse discrete cosine transformer 62 inversely transforms the discrete cosine transform coefficients $F'(u, v)$ and outputs pictures $f(x, y)$. Here, $x, y = 0, 1, 2, \dots, N-1$.

Further, the base of the non-zero coefficient inverse discrete cosine transformer 62 has the same size $N \times N$ as that of the encoding-side discrete cosine transform and the transformer 62 performs inverse discrete cosine transform according to formulas (29) and (30) shown in Fig. 23 while using coefficients not more than b_1 and b_2 for u and v , respectively. While the base of the non-zero coefficient inverse discrete cosine transformer 62 has the same size

as that of the encoding-side base, a large quantity of $F'(u, v) = 0$ data exist as a result of the filtering conducted by the low-pass filter 61. Due to this, the processing speed of the non-zero coefficient inverse discrete cosine transformer 62 greatly improves.

Instead of the inverse discrete cosine transform using the above-stated formulas (29) and (30), butterfly operation may be used. Fig. 15 shows one example of high-speed inverse discrete cosine transform using conventional butterfly operation, i.e., butterfly operation while the filtering is not conducted, and shows a high-speed inverse discrete cosine transform processing as described in B. G. Lee, "A new algorithm to compute the discrete cosine transform", IEEE Trans-Acoust., Speech, and Signal Processing, vol. ASSP-32, pp. 1243-1245, Dec. 1984. Fig. 15 shows an inverse discrete cosine transform processing for a one-dimensional signal while N is 8. It is noted that symbols in Fig. 15 signify a formula (31) shown in Fig. 23. According to the processing of Fig. 15, an inverse discrete cosine transform processing is conducted to eight inputs of $F'(0), F'(1), \dots, F'(7)$ and eight picture outputs of $f(0), f(1), \dots, f(7)$ are obtained.

However, after conducting filtering in this embodiment, the butterfly operation becomes what is shown in Fig. 16. Fig. 16 shows non-zero coefficient inverse discrete cosine transform by means of butterfly operation if a filtering parameter $b1$ is 4 ($b1 = 4$). In this embodiment, only the

four inputs of $F'(0)$ to $F'(3)$ are inputted and an inverse discrete cosine transform processing is conducted, with the result that eight picture data of $f(0)$, $f(1)$, ..., $f(7)$ are decoded. In this way, compared with the conventional
5 inverse discrete cosine transform using N inputs, this embodiment suffices to conduct only inverse discrete cosine transform calculations corresponding to b points in a low range which are not zero, thereby greatly improving a processing speed.

10 The motion vector information decoded by the variable length decoder 51 is inputted into a motion compensation predictor 57 as in the case of the fifth embodiment. The motion vector predictor 57 loads corresponding picture information from the frame memory 58 according to the
15 inputted motion vector information and outputs a motion compensation predictive picture $c(x, y)$.

Also, encode mode information decoded by the variable length decoder 51 controls switching means 59 as in the case of the fifth embodiment. If the encode mode is an intra-plane
20 encode mode, the switching means 59 is turned off, nothing is added to outputs $f(x, y)$ from an inverse discrete cosine transformer 62 by an adder 56, and the results are outputted as decoded picture outputs $r(x, y)$ as they are and stored in a frame memory 58 at the same time.

25 Meanwhile, if the encode mode is a mode other than the intra-plane encode mode, the switching means 59 is turned on, a motion vector predictive picture $c(x, y)$ is added to

outputs $f(x, y)$ from the non-zero coefficient inverse discrete cosine transformer 62 by the adder 56 and the outputs $c(x, y)$ are outputted as decoded picture outputs $r(x, y)$ and stored in the frame memory 58 at the same time.

5 As stated above, according to this embodiment, the base of the non-zero coefficient inverse discrete cosine transformer 62 is the same in size as encoding-side discrete cosine transform. However, since a large quantity of data $F'(u, v) = 0$ exist as a result of filtering conducted by
10 the low-pass filter 61, the substantial processing quantity of the non-zero inverse discrete cosine transformer 62 is greatly reduced and a processing speed thereby greatly improves.

Next, the seventh embodiment will be described with
15 reference to Fig. 17. In this embodiment, a processing speed in a conventional method for decoding only pictures encoded in an intra-plane encode mode and not decoding pictures encoded in modes other than the intra-plane encode mode, is further improved.

20 Compressed video data is inputted into a variable length decoder 51. The variable length decoder 51 decodes an encode mode such as quantization discrete cosine transform coefficients a , encode mode information c and the like. When the encode mode is an intra-plane encode mode, switching
25 means 51a is closed and the quantization discrete cosine transform coefficients a are outputted to an inverse quantizer 52 from the variable length decoder 51. The

quantization discrete cosine transform coefficients a
inputted into the inverse quantizer 52 are dequantized and
discrete cosine transform coefficients $F(u, v)$ are outputted.
The discrete cosine transform coefficients $F(u, v)$ are
5 inputted into a scaling unit 53 which scales coefficient
data.

With a scaling method, the respective discrete cosine
transform coefficients are changed according to a formula
given as the formula (15). Further, to simplify the method,
10 scaling as shown in the formula (16) can be utilized.

The discrete cosine transform coefficients $F'(u, v)$
which have been scaled are inputted into a small-base inverse
discrete cosine transformer 54. In the small-base inverse
discrete cosine transformer 54, the discrete cosine
15 transform coefficients $F'(u, v)$ are inversely transformed
by inverse discrete cosine transform with a base size of
 $N/2^{p1}$ and $N/2^{p2}$ in horizontal and vertical directions,
respectively and pictures $f'(i, j)$ are outputted. The
pictures $f'(i, j)$ are inputted into a resolution converter
20 55, the resolution of the pictures are converted into a
spatial resolution which is the same in size as encoding-side
resolution and outputted as $f(x, y)$. As a spatial resolution
converting method of converting the resolution of $f'(i, j)$
into that of $f(x, y)$, the interpolation method or the simple
25 interpolation method as used in the fifth embodiment can
be used.

The outputs $f(x, y)$ from the resolution converter 55

are outputted as decoded picture outputs $r(x, y)$ as they are.

According to this embodiment, it is possible to greatly improve a processing speed for processing a picture encoded in an intra code mode.

Next, the eighth embodiment of the present invention will be described with reference to Fig. 18. As in the case of the preceding seventh embodiment, a processing speed for processing a picture encoded in an intra code mode in this embodiment is improved.

Compressed video data is inputted into a variable length decoder 51. The variable length decoder 51 decodes an encode mode such as quantization discrete cosine transform coefficients a , encode mode information c and the like. When the encode mode is an intra code mode, switching means 51a is closed and the quantization discrete cosine transform coefficients a are outputted from the variable length decoder 51 to an inverse quantizer 52. The quantization discrete cosine transform coefficients a inputted into the inverse quantizer 52 are dequantized and discrete cosine transform coefficients $F(u, v)$ are outputted. The discrete cosine transform coefficients $F(u, v)$ are inputted into a low-pass filter 61 and coefficient data is filtered therein.

As a filtering method, while coefficients which have been subjected to low-pass filtering are assumed as $F'(u, v)$, filtering using the formulas (25) and (26) can be utilized. Alternatively, filtering using the formulas (27) and (28)

can be utilized. By filtering the coefficients, it is possible to leave only coefficients in a low range among the discrete cosine transform coefficients $F(u, v)$ of $N \times N$ in size.

5 The discrete cosine transform coefficients $F'(u, v)$ which have been subjected to low-pass filtering are inputted into a non-zero coefficient inverse discrete cosine transformer 62. The base of this non-zero coefficient inverse discrete cosine transformer 62 has the same size
10 $N \times N$ as that of the encoding-side base. In the transformer 62, inverse discrete cosine transform is performed by the formulas (29) and (30) with coefficients not more than b_1 and b_2 used for u and v , respectively. Alternatively, as in the case of the sixth embodiment, the butterfly operation
15 shown in Fig. 16 may be utilized.

 The discrete cosine transform coefficients $F'(u, v)$ are inversely transformed by the non-zero coefficient inverse discrete cosine transformer 62 and pictures $f(x, y)$ are outputted. Here, x and y satisfy $x, y = 0, 1, 2, \dots, N-1$. The outputs $f(x, y)$ from the inverse discrete cosine
20 transformer 62 are outputted as decoded picture outputs $r(x, y)$ as they are.

 According to this embodiment, as in the case of the seventh embodiment, it is possible to greatly improve a
25 processing speed for processing a picture encoded in an intra code mode.

 Next, the ninth embodiment of the present invention

will be described with reference to Fig. 19. In Fig. 19, reference symbol 51a denotes switching means and the remaining reference symbols denote the same or equivalent constituent elements as or to those shown in Fig. 13. In
5 this embodiment, a processing speed for decoding a picture which has been subjected to intra coding and one-way predictive encoding is improved.

Compressed video data is inputted into a variable length decoder 51. The variable length decoder 51 decodes
10 quantization discrete cosine transform coefficients a, motion vector information b, encode mode information c and the like. The encode mode information c controls the switching means 51a and 59.

The encode mode information c turns on the switching
15 means 51a when an encode mode is an intra code mode or a one-way predictive encode plane mode. When the encode mode is the intra code mode, the switch 59 is turned off. When the encode mode is the one-way predictive encode plane mode, the switch 59 is turned on. When the encode mode is a mode
20 other than these encode modes, the switching means 51a is turned off. As a result, the quantization discrete cosine transform coefficients a are inputted into an inverse quantizer 52 when the encode mode is the intra code mode or the one-way predictive encode plane mode and decoded
25 picture outputs $r(x, y)$ are finally obtained by the same operation as that described in the fifth embodiment.

According to this embodiment, only intra coded pictures

and one-way predictive encoded pictures are decoded while the other pictures are not decoded. It is, therefore, possible to not only improve a decoding speed due to this thinning-out operation but also improve the processing speed of a small-base inverse discrete cosine transformer 54 described in the fifth embodiment. Thus, the improvement of the processing speed is superior to that in the fifth embodiment.

Next, the tenth embodiment of the present invention will be described with reference to Fig. 20. In Fig. 20, reference symbol 51a denotes switching means and the other reference symbols denote the same or equivalent constituent elements as or to those in Fig. 13. In this embodiment, a processing speed for decoding a picture which has been subjected to intra coding and one-way predictive encoding is improved.

Compressed video data is inputted into a variable length decoder 51. The variable length decoder 51 decodes quantization discrete cosine transform coefficients a, motion vector information b, encode mode information c and the like. The encode mode information c controls the operation of the switching means 51a and 59.

The encode mode information c turns on the switching means 51a when an encode mode is an intra code mode or a one-way predictive encode plane mode. In the intra code mode, the switch 59 is turned off and in the one-way predictive encode plane mode, the switch 59 is turned on. Further,

in modes other than these encode modes, the switching means
51a is turned off. As a result, when the encode mode is
the intra code mode or the one-way predictive encode picture
mode, the quantization discrete cosine transform
5 coefficients a are inputted into an inverse quantizer 52
and decoded picture outputs $r(x, y)$ are finally obtained
by the same operation as that described in the sixth
embodiment.

According to this embodiment, as in the case of the
10 ninth embodiment, it is possible to improve a decoding speed
for decoding a picture which has been subjected to intra
coding and one-way predictive encoding.

Next, the eleventh embodiment of the present invention
will be described with reference to Fig. 21. In Fig. 21,
15 reference symbol 70 denotes an inverse discrete cosine
transformer, reference symbols 71 and 72 denote switches
and the remaining reference symbols denote the same or
equivalent constituent elements as or to those in Fig. 13,
respectively. In this embodiment, an intra coded picture
20 forms a basis for decoding of pictures encoded in other modes.
Due to this, the intra coded picture is decoded in a complete
fashion to thereby improve a decoding speed for decoding
a picture encoded in a mode other than the intra code mode.

Compressed video data is inputted into a variable length
25 decoder 51. The variable length decoder 51 decodes
quantization discrete cosine transform coefficients a,
motion vector information b, encode mode information c and

the like.

The quantization discrete cosine transform coefficients a are inputted into an inverse quantizer 52 and the motion vector information is inputted into a motion compensation predictor 57. The quantization discrete cosine transform coefficients a inputted into the inverse quantizer 52 are dequantized and discrete cosine transform coefficients $F(u, v)$ are outputted.

When an encode mode is an intra code mode, the switch 71 is connected to a terminal $s1$, the switch 72 is connected to a terminal $s3$, the switch 59 is turned off and the quantization discrete cosine transform coefficients a are inputted into an inverse discrete cosine transformer 70. The inverse discrete cosine transformer 70 performs inverse discrete cosine transform by the same base size $N \times N$ as that of the encoding-side base and outputs $f(x, y)$, which are outputted as decoded picture outputs $r(x, y)$ as they are and also stored in a frame memory 58.

Meanwhile, when the encode mode is a mode other than the intra code mode, the switch 71 is connected to a terminal $s2$, the switch 72 is connected to a terminal $s4$, the switch 59 is turned on, and the discrete cosine transform coefficients are inputted into a scaling unit 53 which scales coefficient data. Discrete cosine transform coefficients $F'(u, v)$ which have been subjected to scaling are inputted into a small-base inverse discrete cosine transformer 54, the outputs of which are inputted into a resolution converter

55. Since the operations of the scaling unit 53, the small-base inverse discrete cosine transformer 54, the resolution converter 55 and the remaining constituent elements are the same as those in the fifth embodiment,
5 description will not be given thereto.

According to this embodiment, it is possible to simultaneously realize the improvement of the picture quality of a decoded picture and the improvement of a decoding processing speed.

10 Next, the twelfth embodiment of the present invention will be described with reference to Fig. 22. In Fig. 22, reference symbol 80 denotes an inverse discrete cosine transformer, reference symbols 81 and 82 denote switches and the remaining reference symbols denotes the same or
15 equivalent constituent elements as or to those shown in Fig. 14, respectively. In this embodiment, as in the case of the eleventh embodiment, the intra coded picture is decoded in a complete fashion and a decoding speed for decoding a picture encoded in the other mode is improved.

20 In this embodiment, when an encode mode is an intra code mode, the switch 81 is connected to a terminal s1, the switch 82 is connected to a terminal s3, the switch 59 is turned off and quantization discrete cosine transform coefficients a are inputted into an inverse discrete cosine
25 transformer 80. The inverse discrete cosine transformer 80 performs inverse discrete cosine transform by the same base size $N \times N$ as that at the encoding-side base and outputs

$f(x, y)$, which are outputted as decoded picture outputs $r(x, y)$ as they are and also stored in a frame memory 58.

Meanwhile, when the encode mode is a mode other than the intra code mode, the switch 81 is connected to a terminal s2, the switch 82 is connected to a terminal s4, the switch 59 is turned on, and the discrete cosine transform coefficients $F(u, v)$ are inputted into a low-pass filter 61 which filters coefficient data. The filtered data is then inputted into a non-zero coefficient inverse discrete cosine transformer 62. Since the operations of the low-pass filter 61, the non-zero coefficient inverse discrete cosine transformer 62 and the remaining constituent elements are the same as those in the sixth embodiment, description will not be given thereto.

According to this embodiment, as in the case of the eleventh embodiment, it is possible to simultaneously realize the improvement of the picture quality of a decoded picture and the improvement of a decoding processing speed.

Next, the functions of the decoding apparatus in above-stated embodiments can be realized by software (program), which software can be recorded on a portable type recording medium such as an optical disk, a floppy disk or a hard disk.

Fig. 24 shows one example of a program stored on the storage medium. Fig. 24A shows the contents of the storage medium executing the functions of the decoding apparatus in the embodiment in Fig. 13, whereas Fig. 24B shows the

contents of the storage medium executing the functions of the decoding apparatus in the embodiment in Fig. 14.

A storage medium 200 shown in Fig. 24A stores thereon a decoding program of a variable length decoding function 111, an inverse quantization function 121, a scaling function 131, a small-base inverse discrete cosine transform function 141, a resolution conversion function 151, an addition function 161 and a motion compensation prediction function 171.

10 A storage medium 200 shown in Fig. 24B stores thereon a decoding program of a variable length decoding function 111, an inverse quantization function 121, a low-pass filter function 211, a non-zero coefficient inverse discrete cosine conversion function 221, an addition function 161 and a motion compensation prediction function 171. It is noted that functions recorded on the recording medium may not be all the functions described above but only important functions among them.

Fig. 12 is a block diagram showing the hardware configuration of a computer which reads the decoding program recorded on the portable type storage medium and executes the decoding function. The computer 100 consists of a storage medium 200 on which the above-stated decoded program is recorded, a reader 105 reading the decoding program from the storage medium 200, a CPU 101 executing the decoding program, an ROM 103 storing various data, an RAM 104 storing operation parameters and the like, an input device 102 such

as a keyboard or a mouse, an output device 102 such as a display or a printer, and a bus 106 connecting the respective constituent elements of the computer 100.

The CPU 101 reads the decoding processing program
5 recorded on the storage medium 200 through the reader 105
and then executes the decoding processing program, thereby
executing the above-stated decoding processing. As a frame
memory 58 used to execute the decoding processing program,
part of the region of the RAM 104 or part of the region of
10 a hard disk which is not shown in Fig. 12 can be utilized.
It is noted that the storage medium 200 also includes a
transmission medium for temporarily recording and storing
data such as a network.

Further, the compressed video data thus decoded may
15 be stored in a memory such as the hard disk in advance or
captured into the computer 100 from a network which is not
shown in Fig. 12.

As is obvious from the above-stated description, the
apparatus, the method and the storage medium according to
20 the present invention can obtain the following advantages:

(1) It is possible to efficiently transmit picture
information while suppressing the generation of packet loss
by smoothing packet transmission without the need to employ
FIFO requiring overflow and underflow control and without
25 the need to start another process for network output.

(2) In case of multi-channel transmission, it is
possible to transmit only filtered picture information even

if a network band in the middle of transmission is narrower.

(3) Even if a transmission network band constantly or temporarily exceeds a stream band to make it difficult to compression-transmit live picture information, it is possible to compression-transmit live information from information fed back to the encoder by reducing an encoding bit rate.

(4) It is possible to compression-transmit picture information on a plurality of channels efficiently in a real timemanner by smoothing packet transmission for each channel and by conducting transmission timing control so as to minimize the sum of packet loss rates of the channels.

(5) Since decoding processing is conducted using an inverse discrete cosine transform of small-base size, the low-pass filter of discrete cosine transform coefficients and non-zero coefficient inverse discrete cosine transform, it is possible to decode a compressed video data at higher speed than the conventional speed. Besides, it is possible to provide a storage medium storing program allowing high-speed compressed video data decoding processing.

WHAT IS CLAIMED IS:

1. A real-time picture information
compression-transmission apparatus for
compression-transmitting picture information in a real time
5 manner, comprising:

input means for receiving said picture information;
an encoder encoding said picture information from the
input means on a preset cycle in a real time manner;

storage means for writing and storing
10 real-time-encoded frame data on said picture information
from the encoder for each frame;

division means for sequentially dividing said
real-time-encoded frame data stored in the storage means
into packets for each frame; and

15 transmission timing control and transmission means for
controlling transmission timing to sequentially transmit
the divided packets to a network after a write time for storing
said frame data for the packets and before a time for storing
next frame data, and for transmitting the packets to the
20 network according to a connection-less type protocol.

2. A real-time picture information
compression-transmission apparatus according to claim 1,
25 wherein

the division means for dividing each frame data into
the packets, divides each of said encoded frame data into

the packets in size suited for an Ethernet maximum transfer unit; and

the transmission timing for transmitting the divided packets to the network is determined from an encoded frame
5 interval and a frame data storage time.

3. A real-time picture information compression-transmission apparatus according to claim 1,
10 wherein

the division means for dividing each frame data into the packets is constituted so that:

a payload size of a transmitted UDP packet corresponds to a value obtained by subtracting an IP header size and
15 a UDP header size from an Ethernet maximum transfer unit; and

the number of UDP packets divided from a K-th frame corresponds to a value obtained by dividing a data size, in bytes, of the K-th frame by the payload size, in bytes,
20 of the transmitted UDP packet; and

the transmission timing, controlled by said control means, for transmitting the packets to the network is set so that a transmission time, in seconds, for transmitting the K-th frame data to the network corresponds to a value
25 obtained by subtracting a write time, in seconds, for which said encoder writes the K-th frame data into said storage means, from a frame interval, in seconds, between the K-th

frame data and a $(K + 1)$ th frame data.

4. A real-time picture information
5 compression-transmission apparatus according to claim 1,
wherein

if multi-channel transmission is conducted, the
transmitted packets are further filtered using one of UDP
port numbers and IP multi-cast addresses, whereby even if
10 a network band in which the packets are being transmitted
is narrowed, filtered picture information can be
transmitted.

15 5. A real-time picture information
compression-transmission apparatus according to claim 2,
wherein

if multi-channel transmission is conducted, the
transmitted packets are further filtered using one of UDP
20 port numbers and IP multi-cast addresses, whereby even if
a network band in which the packets are being transmitted
is narrowed, filtered picture information can be
transmitted.

25

6. A real-time picture information
compression-transmission apparatus according to claim 3,

wherein

if multi-channel transmission is conducted, the transmitted packets are further filtered using one of UDP port numbers and IP multi-cast addresses, whereby even if
5 a network band in which the packets are being transmitted is narrowed, filtered picture information can be transmitted.

10 7. A real-time picture information compression-transmission apparatus for compression-transmitting live picture information in a real time manner, comprising:

input means for receiving said live picture
15 information;

an encoder encoding said live picture information from the input means on a preset cycle in a real time manner;

storage means for writing and storing real-time-encoded frame data on said picture information
20 from the encoder for each frame;

division means for sequentially dividing said real-time-encoded frame data stored in the storage means into packets for each frame;

transmission timing control and transmission means for
25 controlling transmission timing to sequentially transmit the divided packets to a network after a write time for storing said frame data for the packets and before a time for storing

next frame data, and for transmitting the packets to the network according to a connection-less type protocol;

packet loss detection means for detecting packet loss of the packets transmitted to the network; and

5 encoding bit rate control means for controlling an encoding bit rate of said encoder by the detected packet loss.

10 8. A real-time picture information compression-transmission apparatus according to claim 7, wherein

the packet loss detection means detects said packet loss by searching an order of serial numbers in the packets;

15 the encoding bit rate control means controls said encoder to reduce said encoding bit rate if a packet loss value exceeds a threshold.

20 9. A real-time picture information compression-transmission apparatus according to claim 7, wherein

each of the serial numbers in said packets is inserted after a packet header and into a top of user packet data.

25

10. A real-time picture information

compression-transmission apparatus for
compression-transmitting picture information on a
plurality of channels in a real time manner, comprising:

a plurality of sets of input means for receiving said
5 picture information;

a plurality of sets of encoders encoding said picture
information from the input means on a preset cycle in a real
time manner;

a plurality of sets of storage means for writing and
10 storing real-time encoded frame data on said picture
information from the encoder for each frame;

a plurality of sets of division means for sequentially
dividing said real-time encoded frame data stored in the
storage means into packets for each frame;

15 a plurality of sets of transmission timing control and
transmission means for controlling transmission timing to
sequentially transmit the divided packets to a network after
a write time for storing said frame data for the packets
and before a time for storing next frame data, and for
20 transmitting the packets to the network according to a
connection-less type protocol, wherein

the plurality of sets of input means, encoders, storage
means, division means and transmission timing control and
transmission means are prepared to correspond to the picture
25 information on the plurality of channels, respectively, so
as to process live picture information on said plurality
of channels;

packet loss detection means for detecting packet loss
of the packets transmitted to the network; and

transmission timing control and adjustment means for
adjusting and controlling said transmission timing
5 controlled and transmitted by said plurality of sets of
transmission timing control and transmission means,
respectively.

10 11. A real-time picture information
compression-transmission apparatus according to claim 10,
wherein

the adjustment and control of said transmission timing
is carried out so as to minimize a sum of packet loss rates
15 of the respective channels.

12. A real-time picture information
compression-transmission apparatus according to claim 10,
20 wherein

the adjustment and control of said transmission timing
is carried out by setting same or different packet
transmission start offset for each channel, the packet
transmission start offset conducted to be changed in frame
25 units.

13. A real-time picture information compression-transmission apparatus according to claim 11, wherein

the adjustment and control of said transmission timing
5 is carried out so that a J channel packet transmission delay corresponds to a value obtained by dividing an eightfold value of a product between the Ethernet maximum transfer unit and a J channel timing fine adjustment parameter SJ, where $1 \leq J \leq N$, and N is the number of channels, by an
10 effective network band in bit/sec, and so that an upper limit of packet transmission timing fine adjustment parameters SJ, where SJ includes S1, S2, S3, ..., SN, N is total channel number, and $1 \leq J \leq N$, corresponds to a value obtained by
15 dividing an average packet transmission interval per channel by a time required to transmit the Ethernet maximum transfer unit.

14. A real-time picture information
20 compression-transmission method for compression-transmitting picture information in a real time manner, comprising:

an encoding step of encoding said picture information on a preset cycle in a real time manner;
25 a storage step of writing and storing real-time-encoded frame data on said picture information for each frame;
a division step of sequentially dividing said

real-time-encoded frame data into packets for each frame;
and

a transmission timing control and transmission step
of controlling transmission timing to sequentially transmit
5 the divided packets to a network after a write time for storing
said frame data for the packets and before a time for storing
next frame data, and of transmitting the packets to the
network according to a connection-less type protocol.

10

15. A real-time picture information
compression-transmission method for
compression-transmitting live picture information in a real
time manner, comprising:

15 an encoding step of encoding said live picture
information on a preset cycle in a real time manner;

a storage step of writing and storing real-time-encoded
frame data on said picture information for each frame;

a division step of sequentially dividing said
20 real-time-encoded frame data into packets for each frame;

a transmission timing control and transmission step
of controlling transmission timing to sequentially transmit
the divided packets to a network after a write time for storing
said frame data for the packets and before a time for storing
25 next frame data, and of transmitting the packets to the
network according to a connection-less type protocol;

a packet loss detection step of detecting packet loss

of the packets transmitted to the network; and

an encoding bit rate control step of controlling an encoding bit rate in said encoding step by the detected packet loss.

5

16. A real-time picture information compression-transmission method for compression-transmitting picture information on a plurality of channels in a real time manner, comprising:

10 an encoding step of encoding said picture information on a preset cycle in a real time manner;

a storage step of writing and storing real-time encoded frame data on said picture information for each frame;

15 a division step of sequentially dividing said real-time encoded frame data into packets for each frame;

a transmission timing control and transmission step of controlling transmission timing to sequentially transmit the divided packets to a network after a write time for storing said frame data for the packets and before a time for storing next frame data, and of transmitting the packets to the network according to a connection-less type protocol;

20

a packet loss detection step of detecting packet loss of the packets transmitted to the network; and

25 a transmission timing control and adjustment step of adjusting and controlling said transmission timing in said transmission timing control and transmission step for said

each channel by the detected packet loss.

17. A storage medium stored a control program for
5 allowing a computer to control compression-transmitting
picture information in a real time manner, the control
program allowing the computer to control:

encoding said picture information on a preset cycle
in a real time manner;

10 writing and storing real-time-encoded frame data on
said picture information for each frame;

sequentially dividing said real-time-encoded frame
data into packets for each frame; and

controlling transmission timing to sequentially
15 transmit the divided packets to a network after a write time
for storing said frame data for the packets and before a
time for storing next frame data, and transmitting the
packets to the network according to a connection-less type
protocol.

20

18. A storage medium stored a control program for
allowing a computer to control compression-transmitting
live picture information in a real time manner, the control
25 program allowing the computer to control:

encodingsaidlivepictureinformationonapresetcycle
in a real time manner;

writing and storing real-time-encoded frame data on
said picture information for each frame;

sequentially dividing said real-time-encoded frame
data into packets for each frame;

5 controlling transmission timing to sequentially
transmit the divided packets to a network after a write time
for storing said frame data for the packets and before a
time for storing next frame data, and transmitting the
packets to the network according to a connection-less type
10 protocol;

 detecting packet loss of the packets transmitted to
the network; and

 controlling an encoding bit rate in said encoding by
the detected packet loss.

15

19. A storage medium stored a control program for
allowing a computer to control compression-transmitting
live picture information on a plurality of channels in a
20 real time manner, the control program allowing the computer
to control, with respect to the live picture information
on the plurality of channels, for each channel:

 encoding said picture information on a preset cycle
in a real time manner;

25 writing and storing real-time encoded frame data on
said picture information for each frame;

 sequentially dividing said real-time encoded frame

data into packets for each frame;

controlling transmission timing to sequentially transmit the divided packets to a network after a write time for storing said frame data for the packets and before a
5 time for storing next frame data, and transmitting the packets to the network according to a connection-less type protocol;

detecting packet loss of the packets transmitted to the network; and

10 adjusting control of said transmission timing for said each channel by the detected packet loss.

20. A picture information decoding apparatus for
15 decoding compressed video data using motion compensation prediction and discrete cosine transform, comprising:

means for converting an inversely-quantized discrete cosine transform coefficient into a smaller base than an encoding-side discrete cosine transform base;

20 means for performing inverse transform using inverse discrete cosine transform using the smaller base than the encoding-side discrete cosine transform base; and

means for converting picture data subjected to the inverse discrete cosine transform into picture data having
25 a same size as a size of the compressed video data.

21. A picture information decoding apparatus according to claim 20, wherein

the picture information decoding apparatus decodes only intra coded pictures.

5

22. A picture information decoding apparatus according to claim 20, further comprising:

means for conducting motion compensation prediction
10 to block data having a same size as a size of encoded block data, and for restoring picture block data inversely discrete cosine transformed to have the same block size as the size of said encoded block data, into the video data; and

means for storing the restored video data for said
15 motion compensation prediction.

23. A picture information decoding apparatus according to claim 22, wherein

20 the picture information decoding apparatus decodes only intra coded pictures and one-way predictive encoded pictures.

24. A picture information decoding apparatus according to claim 22, wherein

the picture information decoding apparatus further

comprises means, connected to means for performing inverse transform using inverse discrete cosine transform using the smaller base than said encoding-side discrete cosine transform base through switching means, for conducting
5 inverse discrete cosine transform with a same block size as a block size of said compressed video data;

the intra coded pictures are decoded by the means for conducting inverse discrete cosine transform to the block data of the same block size as the size of said encoded block
10 data; and

encoded pictures other than the intra coded pictures are subjected to an inverse transform processing using the inverse discrete cosine transform having the smaller base than the encoding-side discrete cosine transform base, and
15 decoded by conducting said motion compensation prediction.

25. A picture information decoding apparatus according to claim 20, wherein
20 said means for converting said inversely-quantized discrete cosine transform coefficient into the smaller base than the encoding-side discrete cosine transform base is scaling means.

25

26. A picture information decoding apparatus for decoding compressed video data using motion compensation

prediction and discrete cosine transform, comprising:

means for low-pass filtering an inversely quantized discrete cosine transform coefficient; and

means for inversely transforming the low-pass filtered
5 data using an inverse discrete cosine transform having a base of a same size as a size of an encoding-side discrete cosine transform base, wherein

the inverse discrete cosine transform is to inversely transform a non-zero discrete cosine transform coefficient.

10

27. A picture information decoding apparatus according to claim 26, wherein

the picture information decoding apparatus decodes
15 only intra coded pictures.

28. A picture information decoding apparatus according to claim 27, further comprising:

20 means for conducting motion compensation prediction to block data having a same size as a size of encoded block data, and for restoring the video data; and

means for storing the restored video data for said motion compensation prediction.

25

29. A picture information decoding apparatus

according to claim 28, wherein

the picture information decoding apparatus decodes only intra coded pictures and one-way predictive encoded pictures.

5

30. A picture information decoding apparatus according to claim 28, wherein

the picture information decoding apparatus further
10 comprises means, connected to means for inversely transform said low-pass filtered data using inverse discrete cosine transform having a base of a same size as a size of an encoding-side discrete cosine transform base through switching means, for conducting discrete cosine transform
15 to the data of a same block size as a block size of the compressed video data;

the intra coded pictures are decoded by the means for conducting discrete cosine transform to the data of the same block size as the block size of said compressed video data;

20 and

encoded pictures other than the intra coded pictures are decoded by inversely transforming said low-pass filtered data using the inverse discrete cosine transform having the base of the same size as the size of the encoding-side discrete cosine transform base, and by conducting said motion
25 compensation prediction.

31. A computer readable storage medium stored a program for allowing a computer to execute:

5 a step of converting an inversely-quantized discrete cosine transform coefficient into a smaller base than an encoding-side discrete cosine transform base;

a step of performing inverse transform using inverse discrete cosine transform having the smaller base than the encoding-side discrete cosine transform base; and

10 a step of converting picture data subjected to the inverse discrete cosine transform into picture data having a same size as a size of the compressed video data.

15 32. A computer readable storage medium stored a program for allowing a computer to execute:

a step of low-pass filtering an inversely-quantized discrete cosine transform coefficient; and

20 a step of inversely transforming the low-pass filtered data using a base of a same size as a size of an encoding-side discrete cosine transform base.

33. A computer readable storage medium according to claim 31, wherein

the storage medium further stores a program for a step of conducting motion compensation prediction to block data

having a same size as a size of encoded block data, and of restoring a video data.

ABSTRACT OF THE DISCLOSURE

The present invention provides a real-time live picture information compression-transmission apparatus and method using a connection-less type protocol for a computer network.

- 5 The compression-transmission apparatus is constituted to divide framed data output from a real-time encoder compressing live picture information into packets, and to transmit the live picture information in a real time manner according to the connection-less type protocol while suppressing burst
- 10 transmission by conducting transmission control. The present invention also provides a compressed video data decoding apparatus capable of reducing compressed video decoding processing load without deteriorating picture quality and decreasing the number of played back picture
- 15 planes when playing back a picture.

Fig. 1



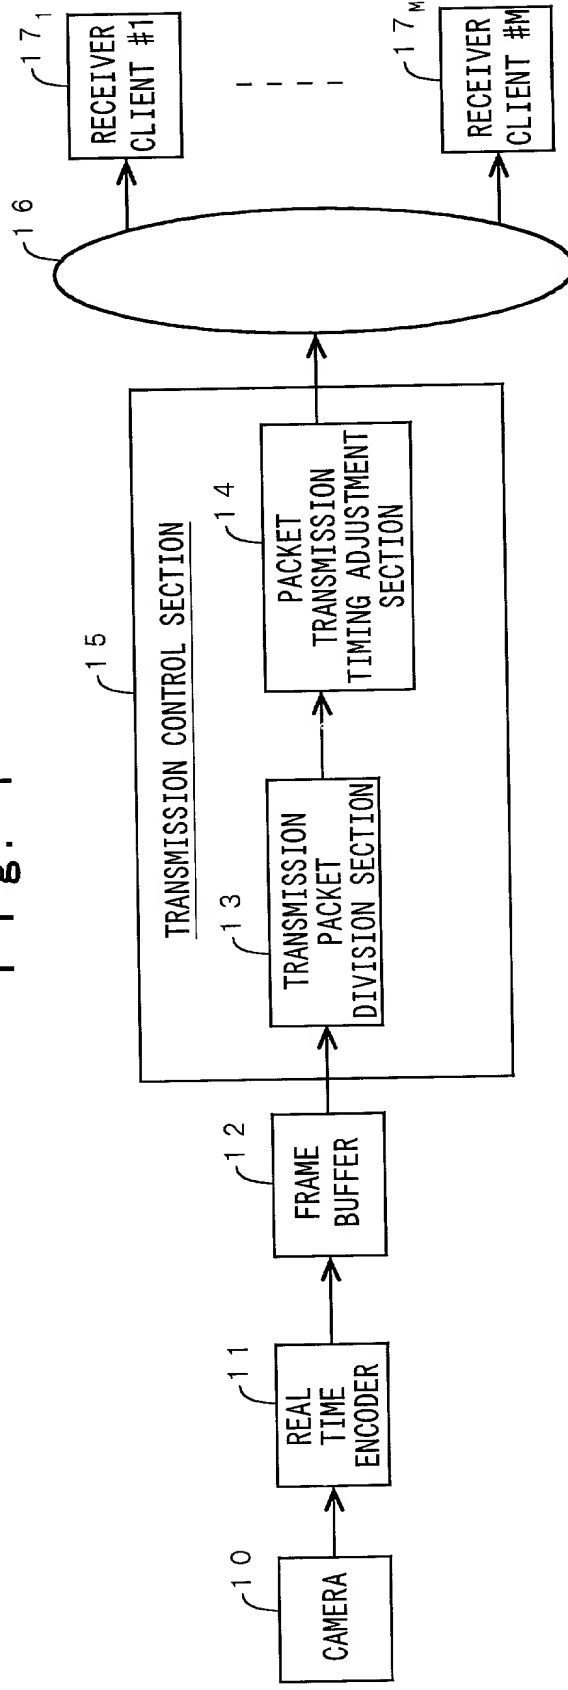


Fig. 2

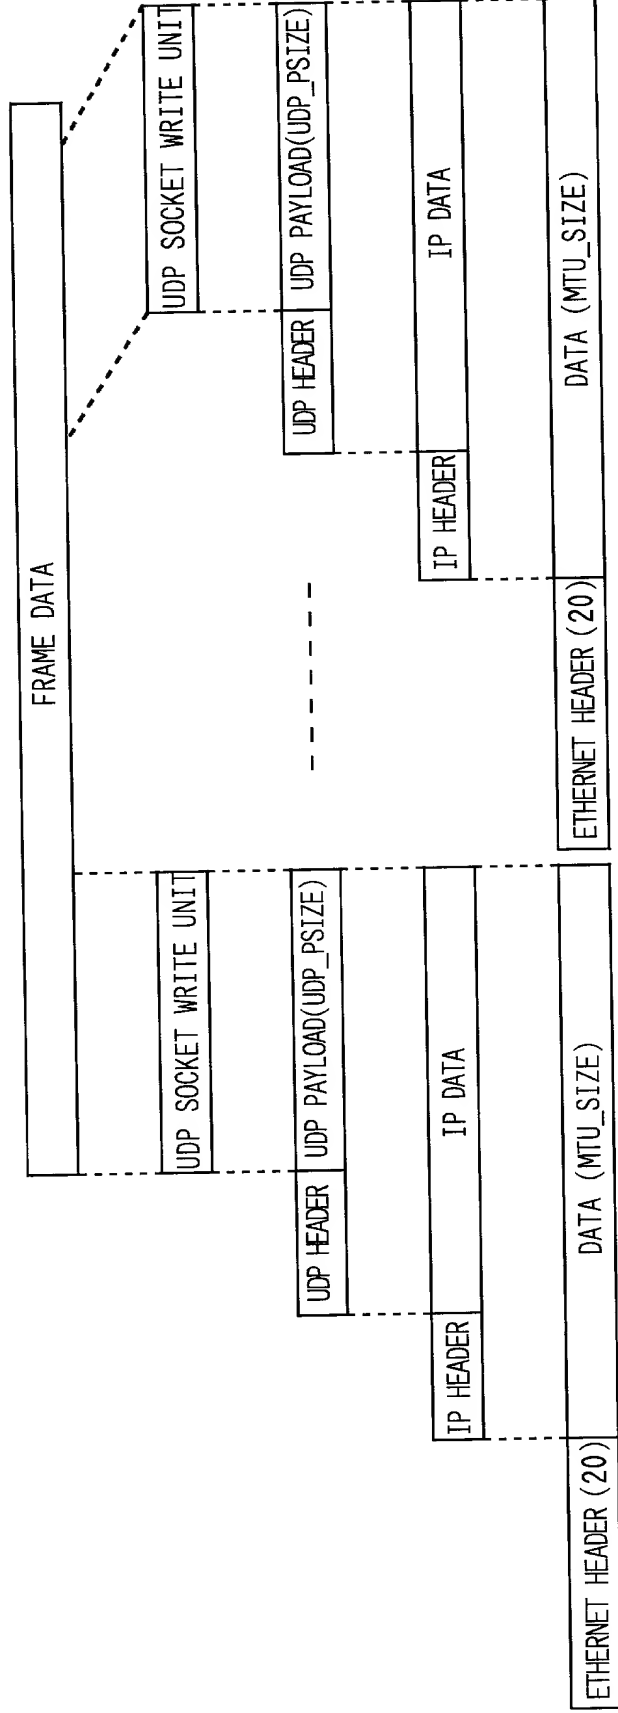

F i g . 3

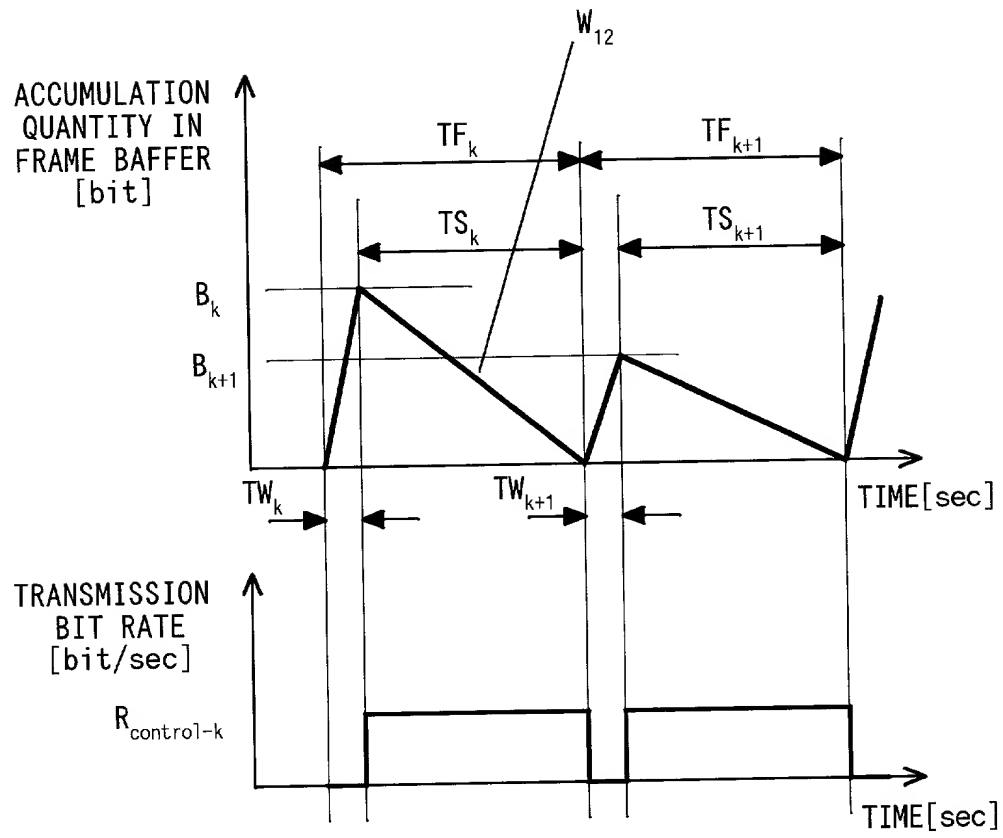

F i g . 4


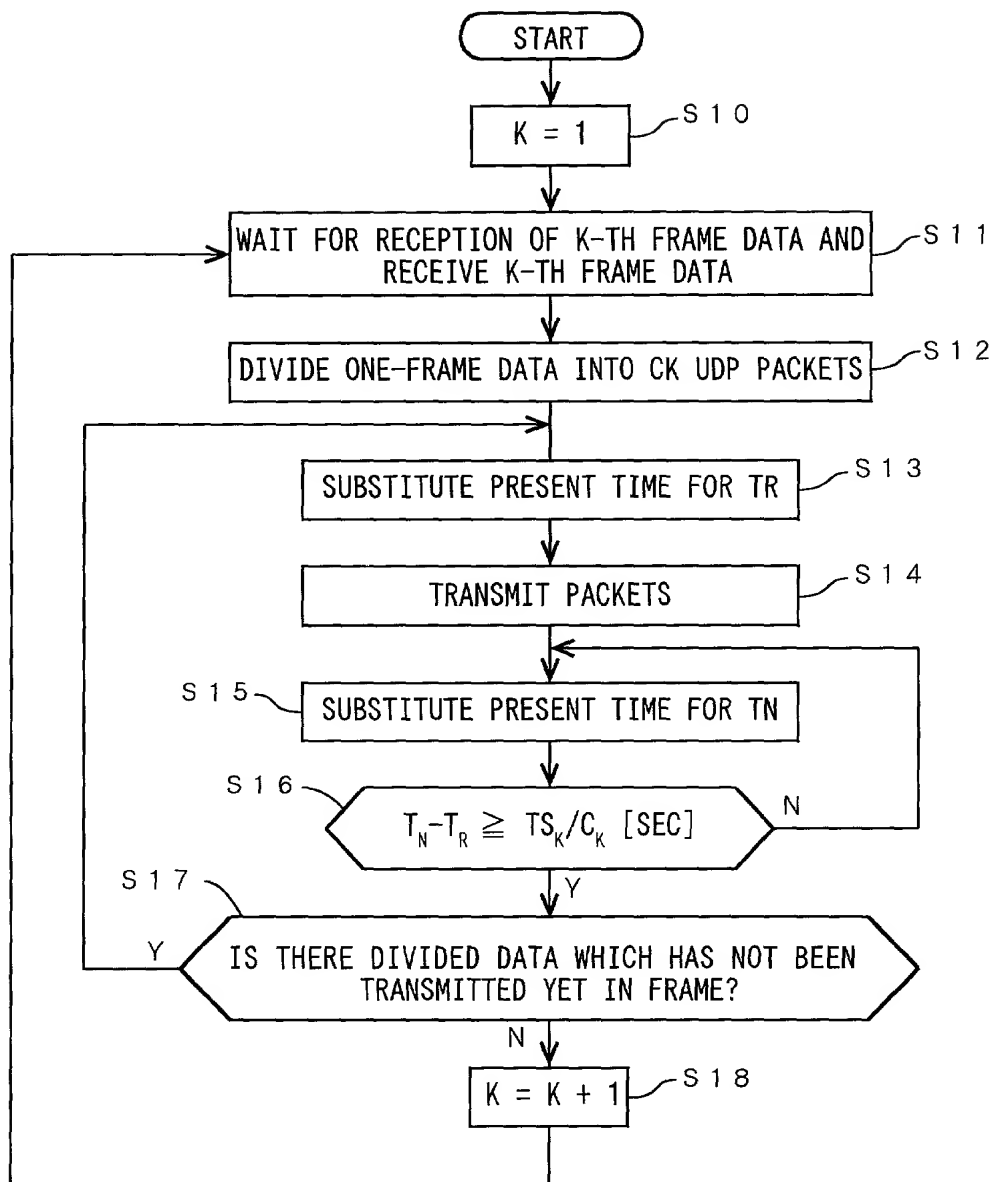


Fig. 5

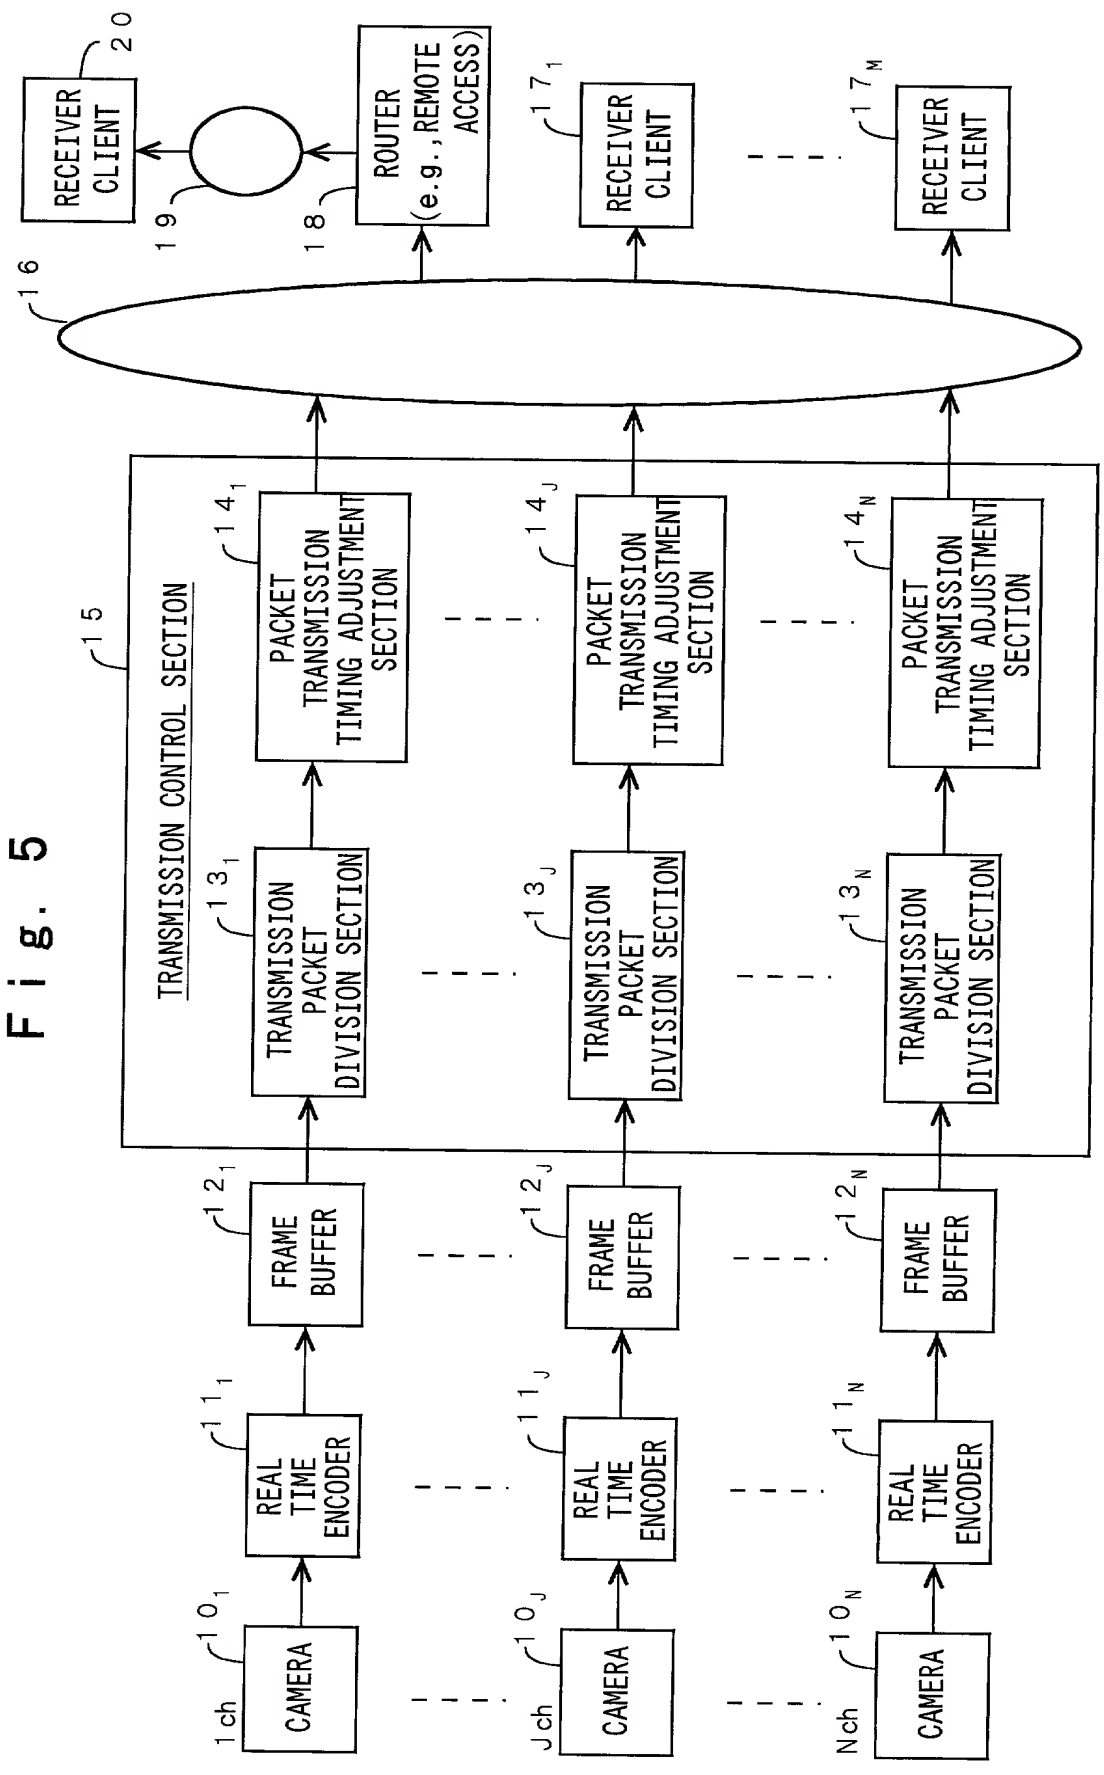

6 / 29

Fig. 6


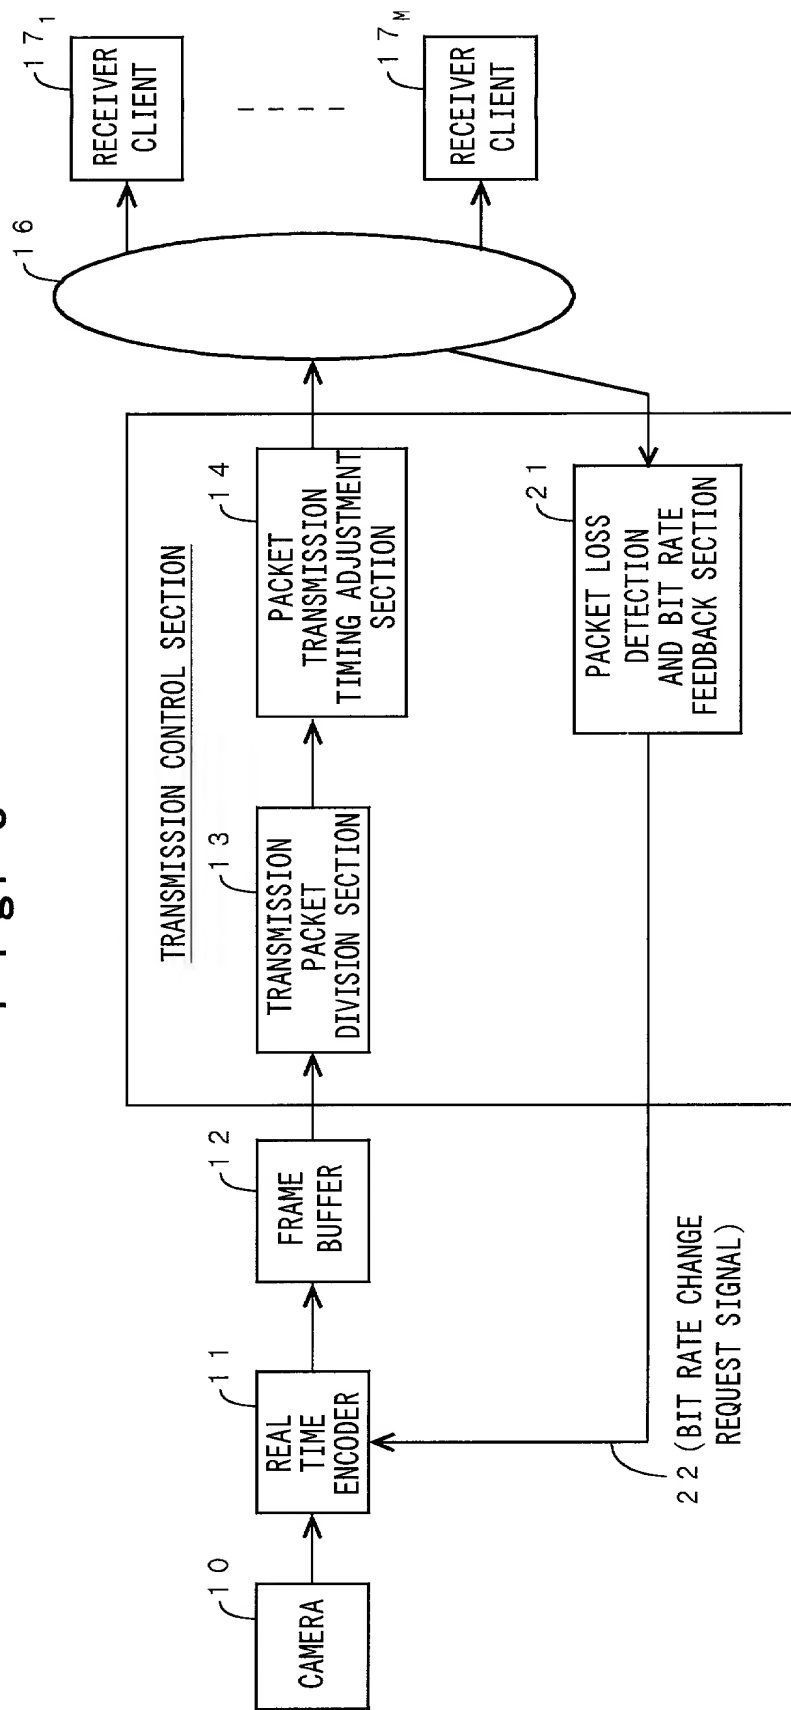


Fig. 7

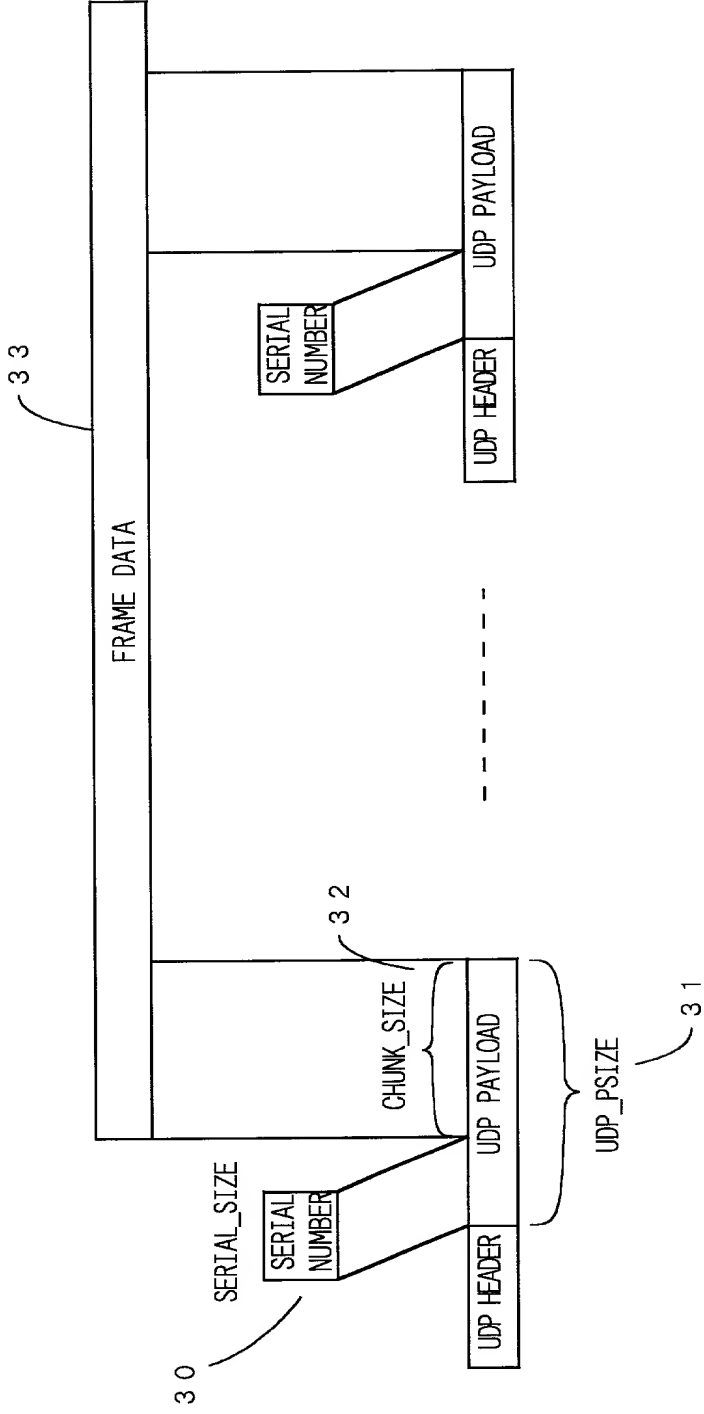

8 / 29

Fig. 8

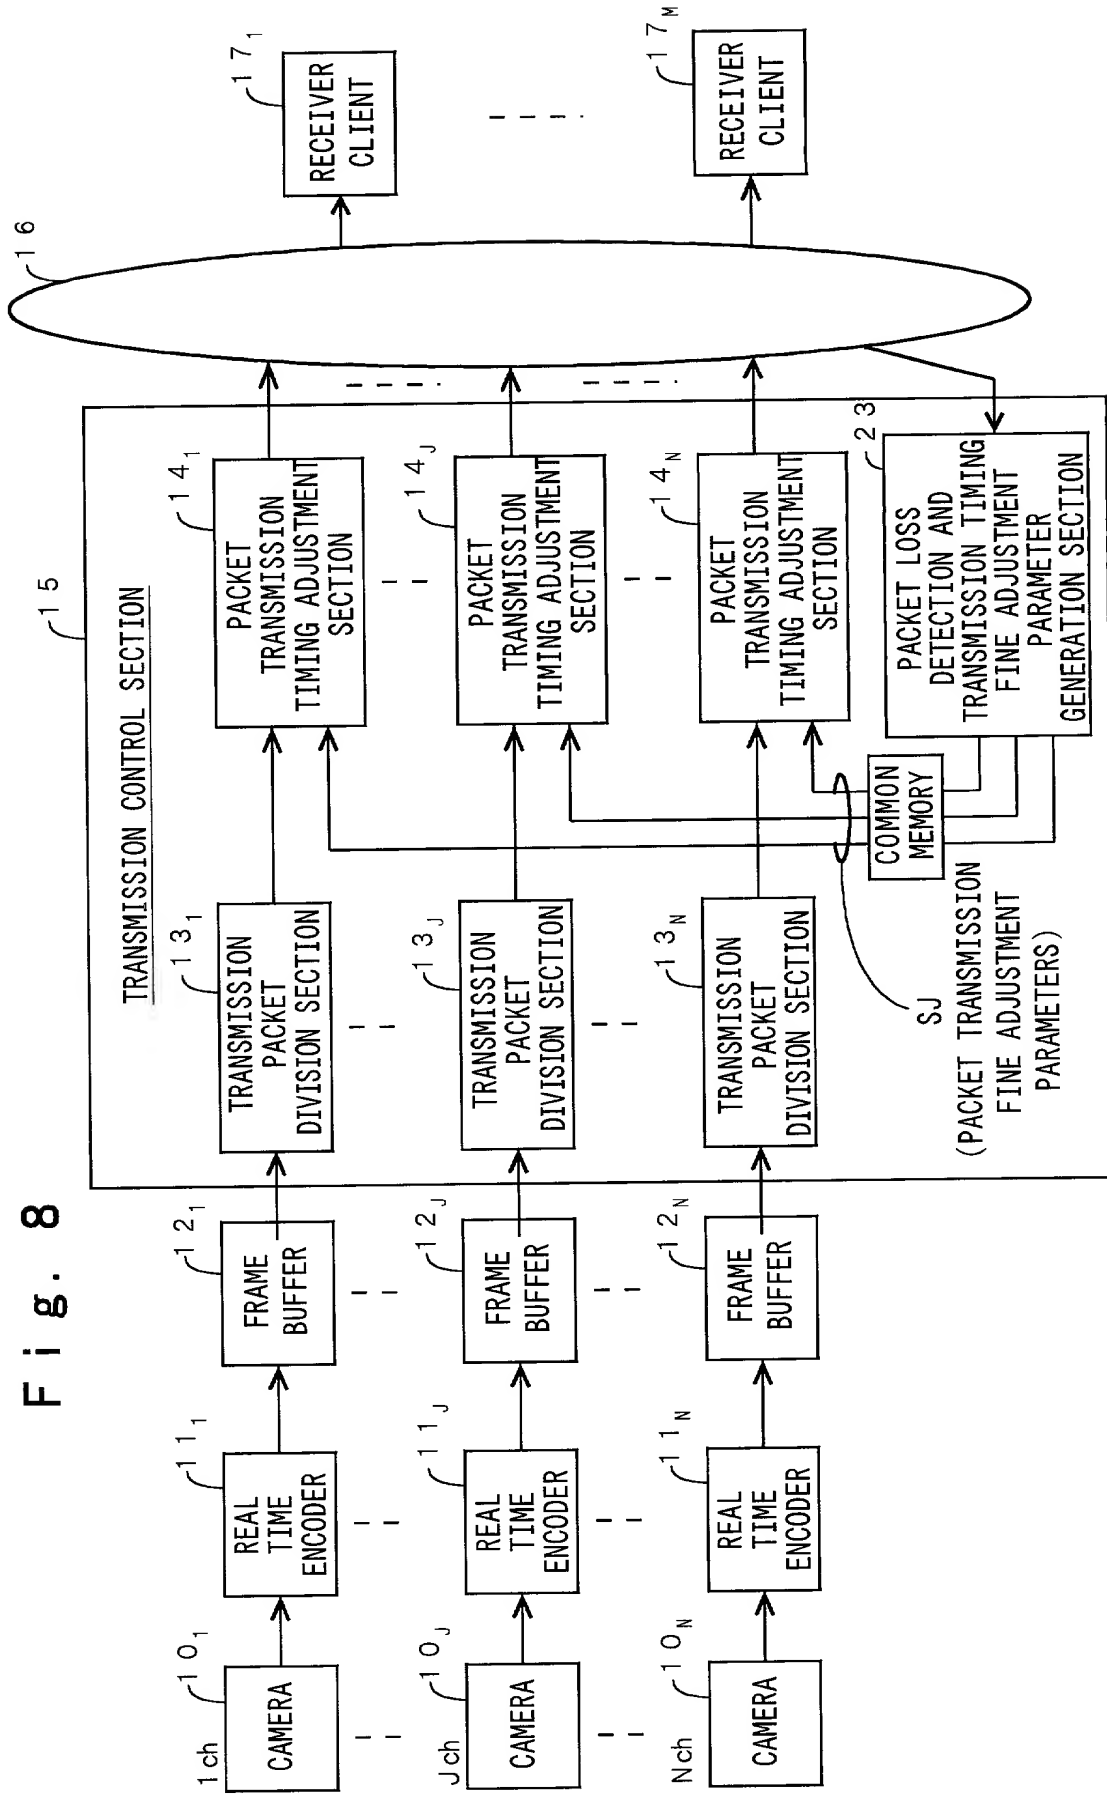


Fig. 9


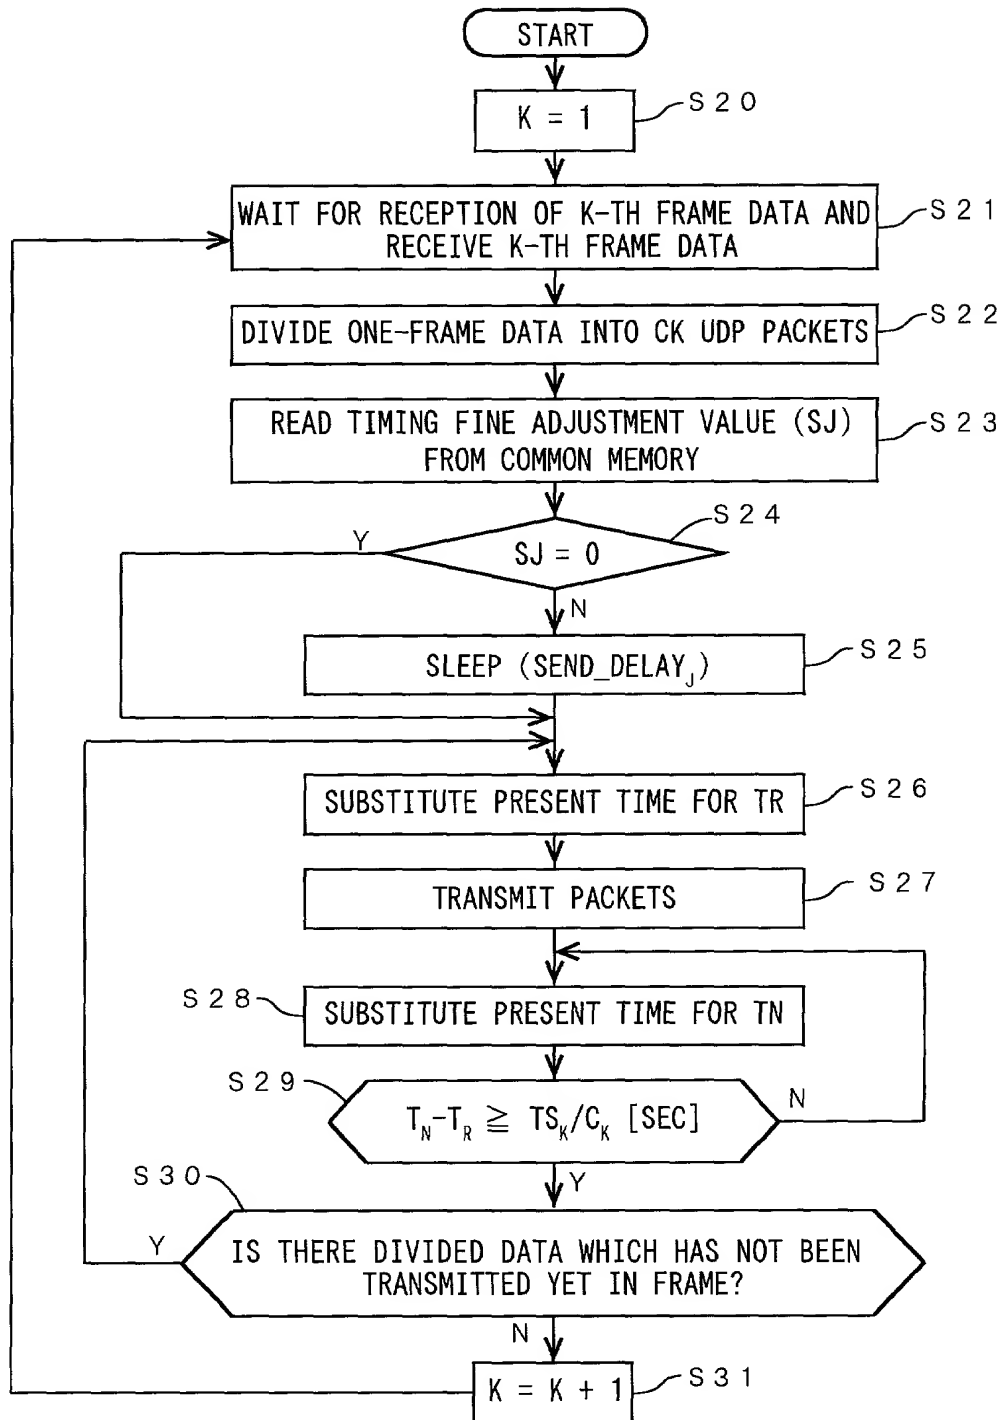


Fig. 10

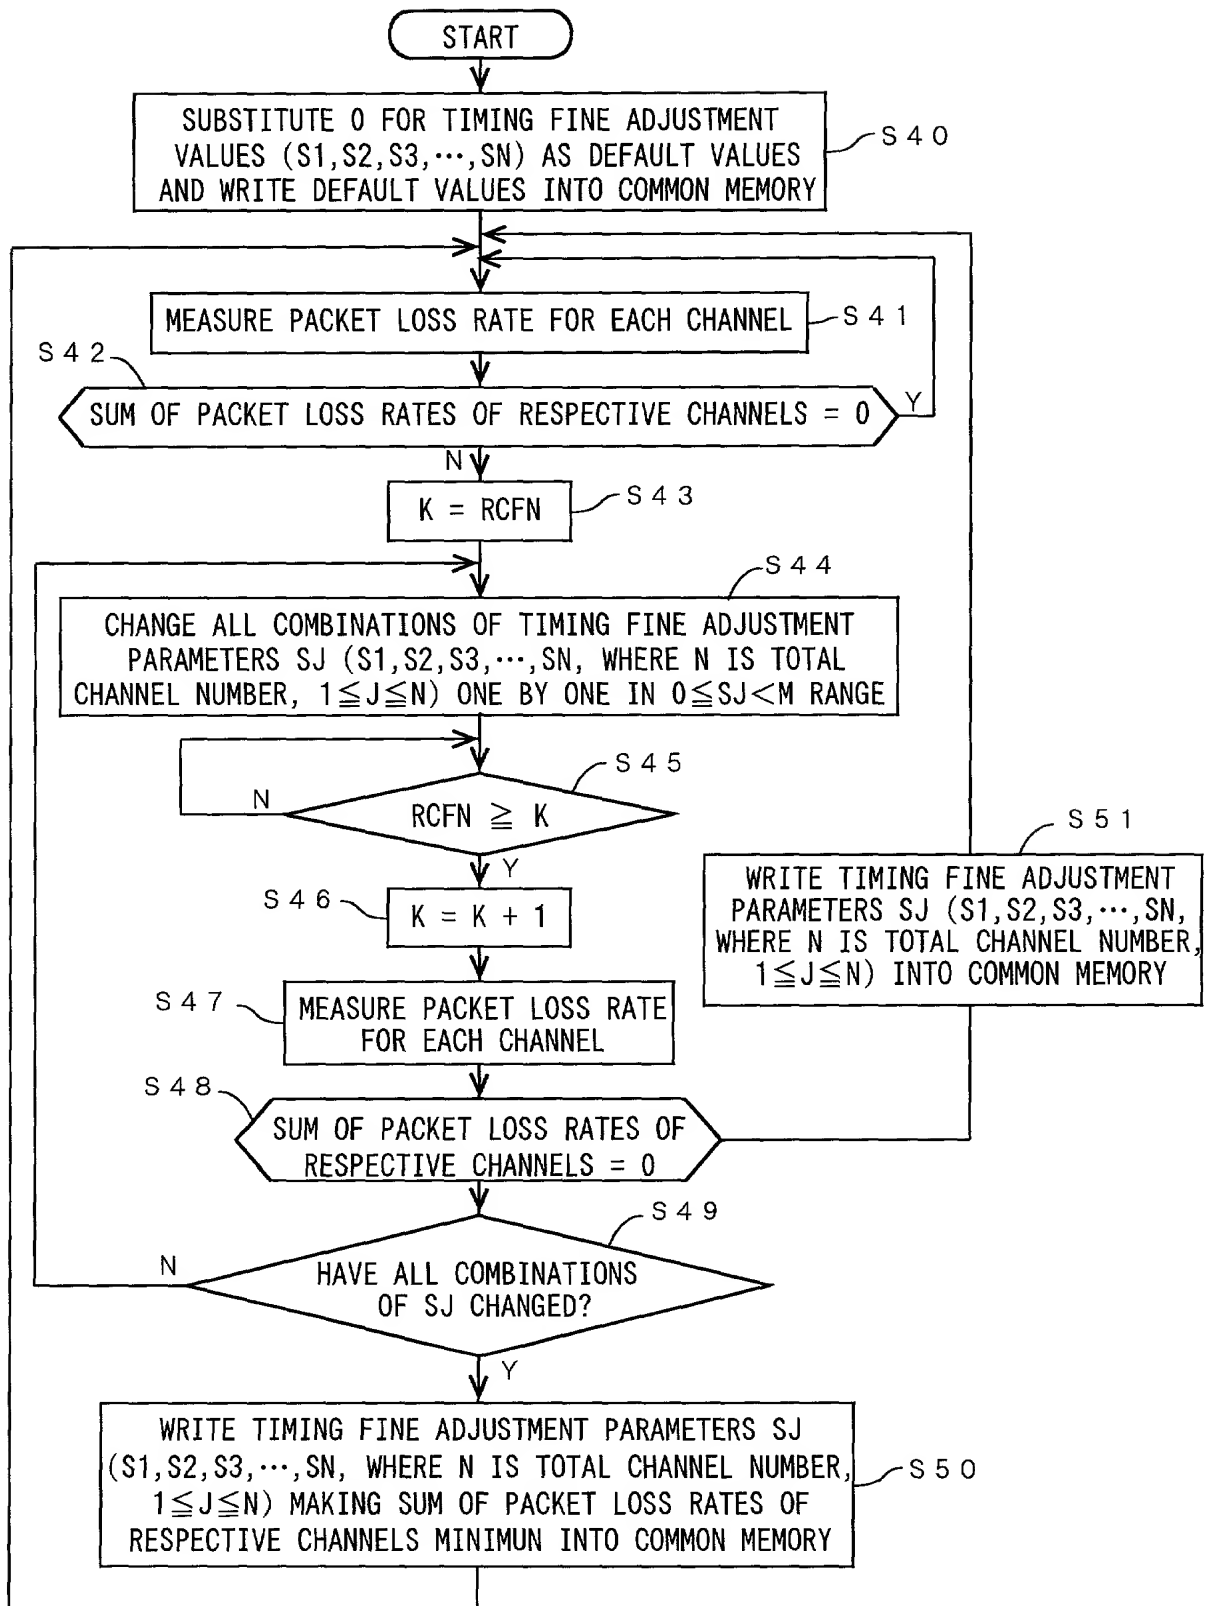

11-60-11


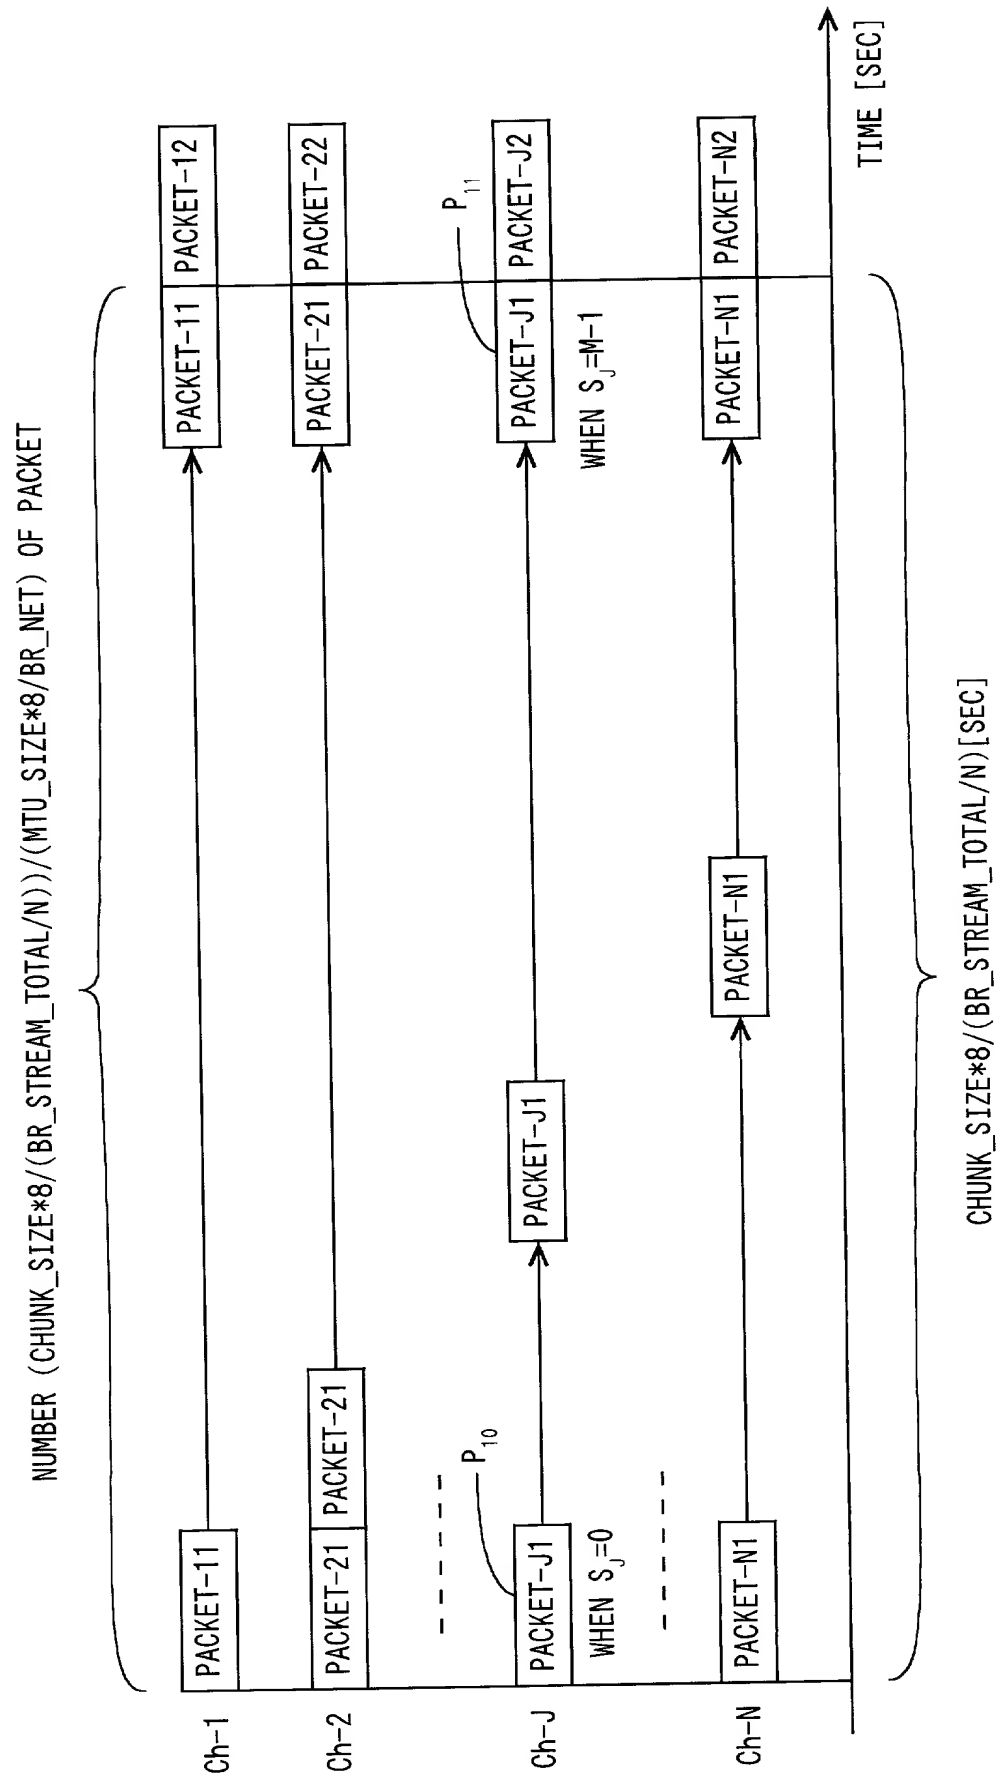


Fig. 12

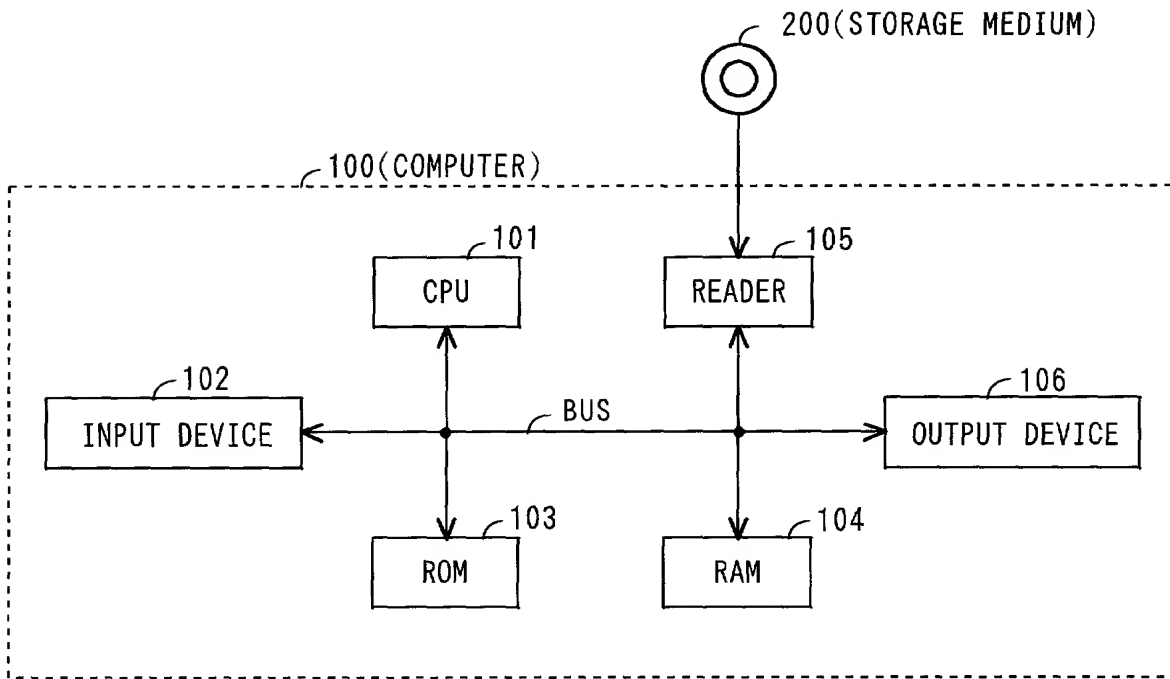

13/29

Fig. 13



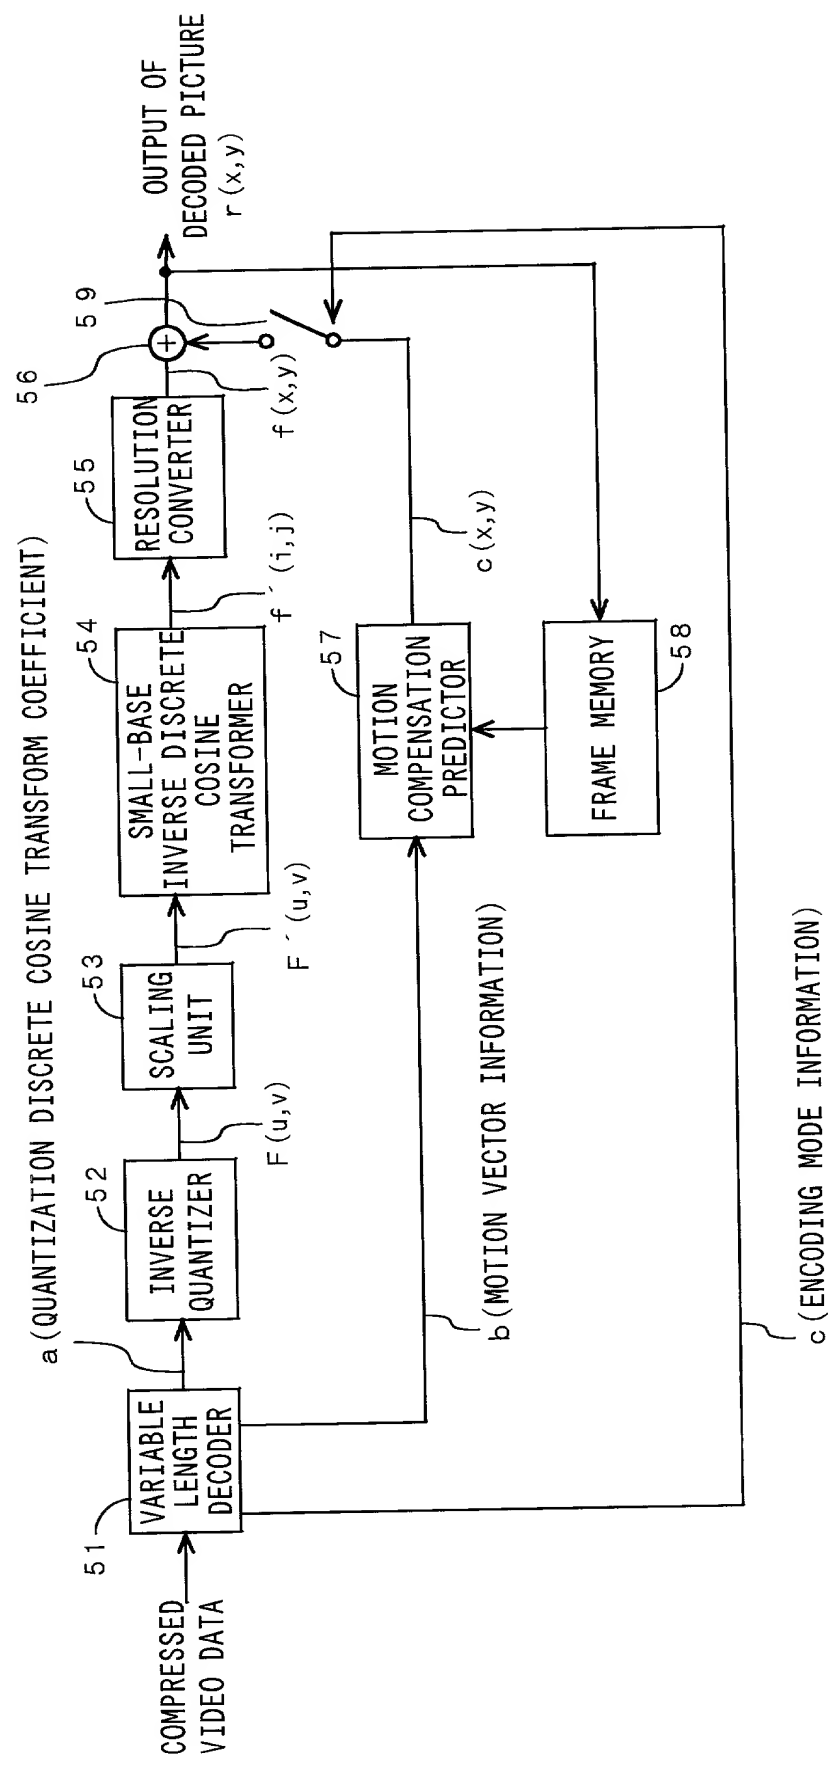


Fig. 14

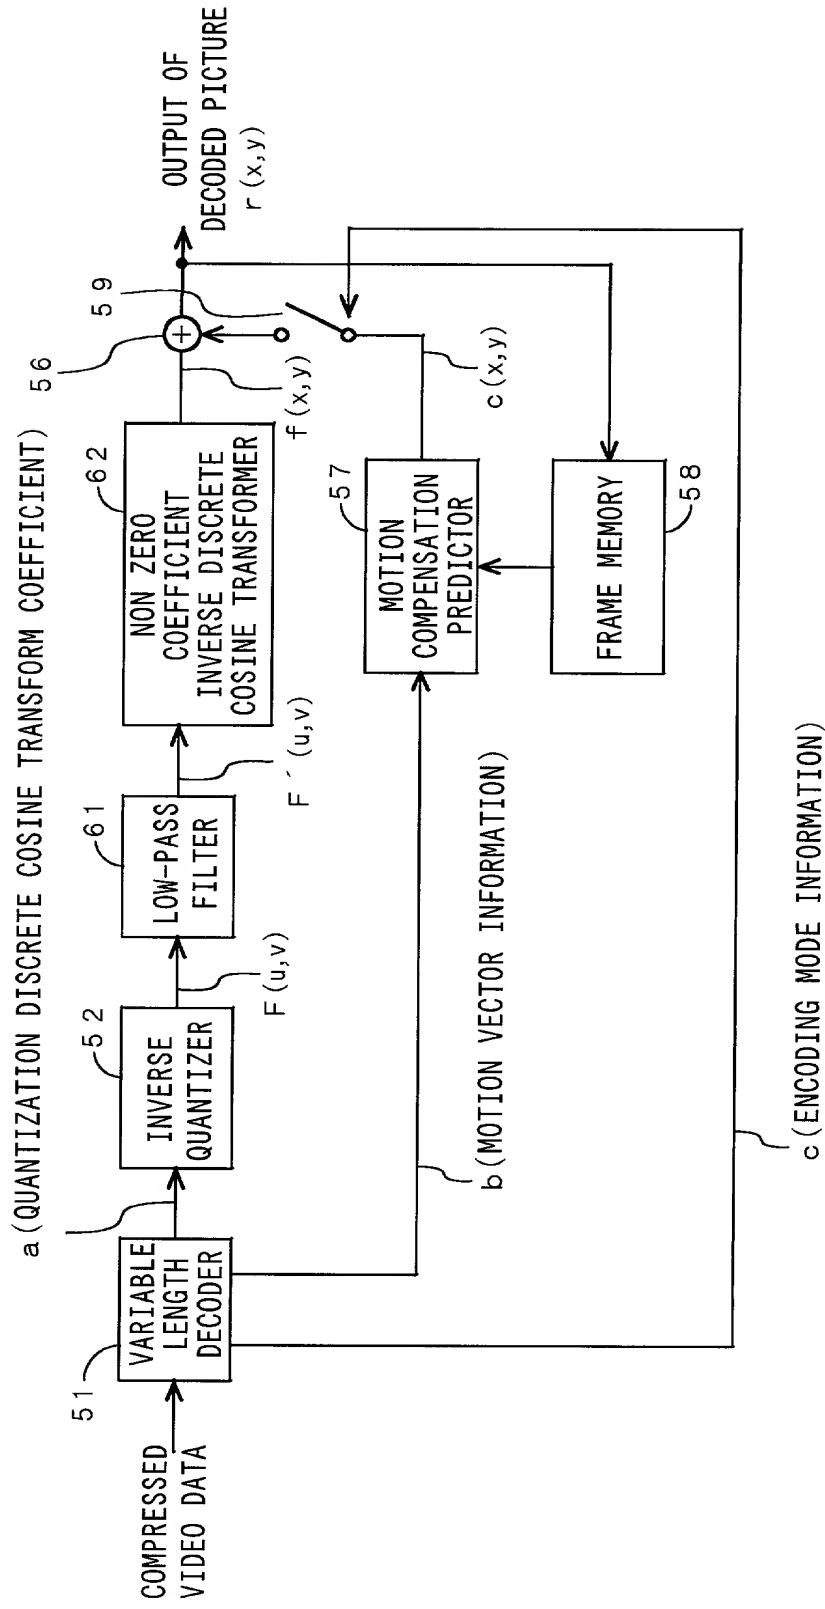

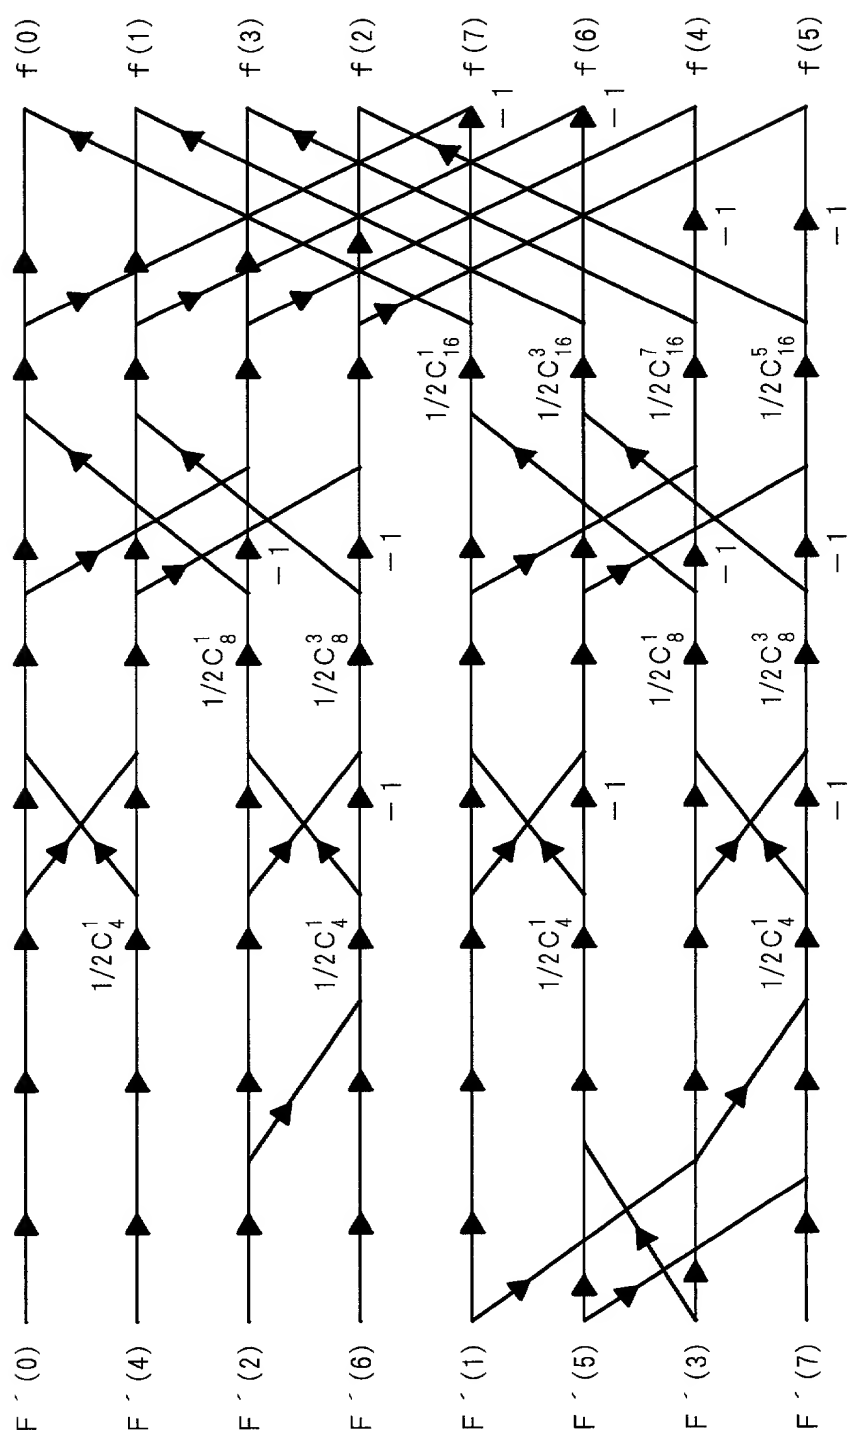

16/29

Fig. 16

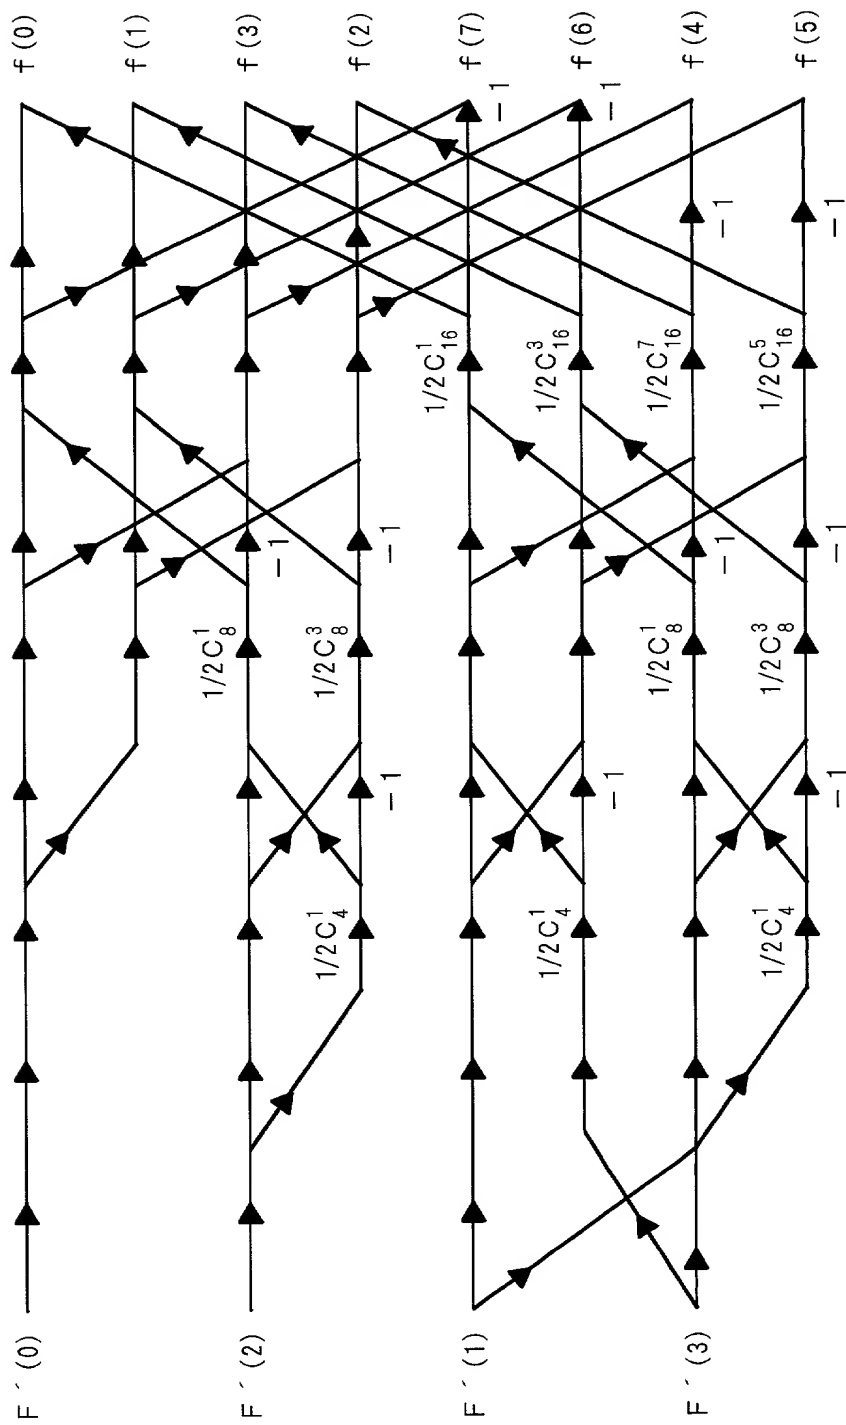


Fig. 17

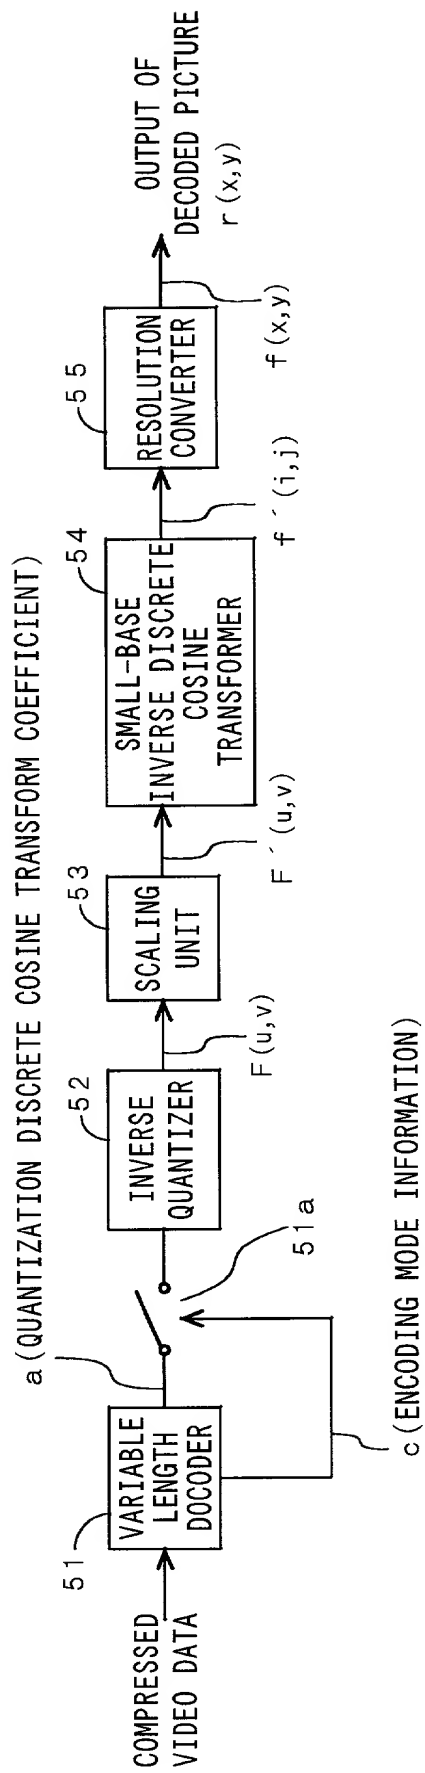


Fig. 18

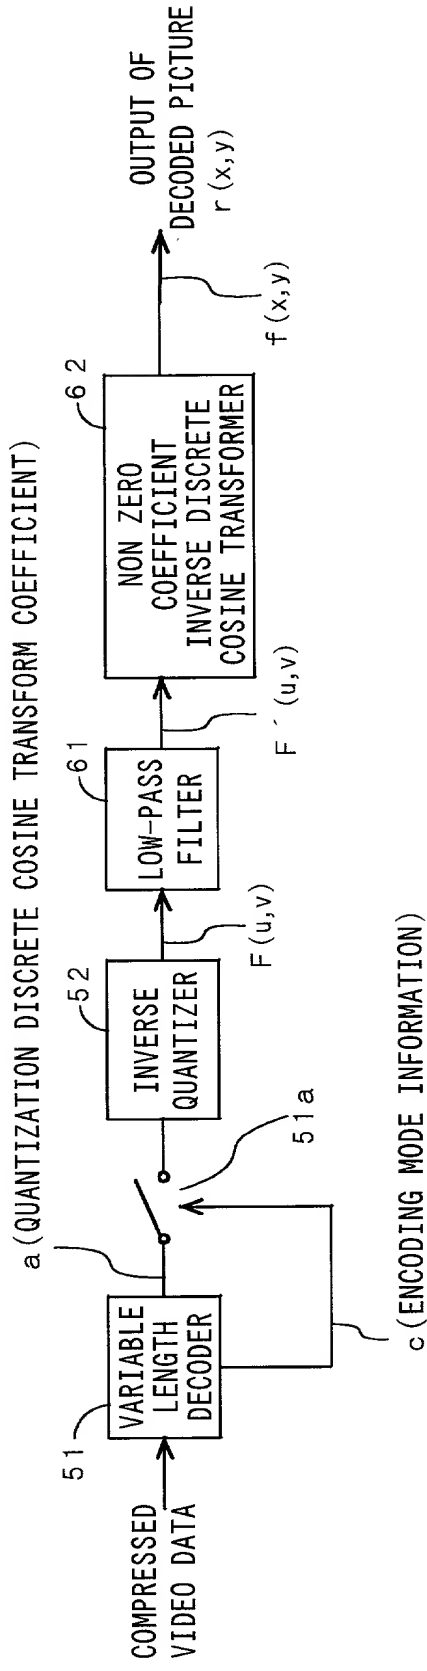


Fig. 19

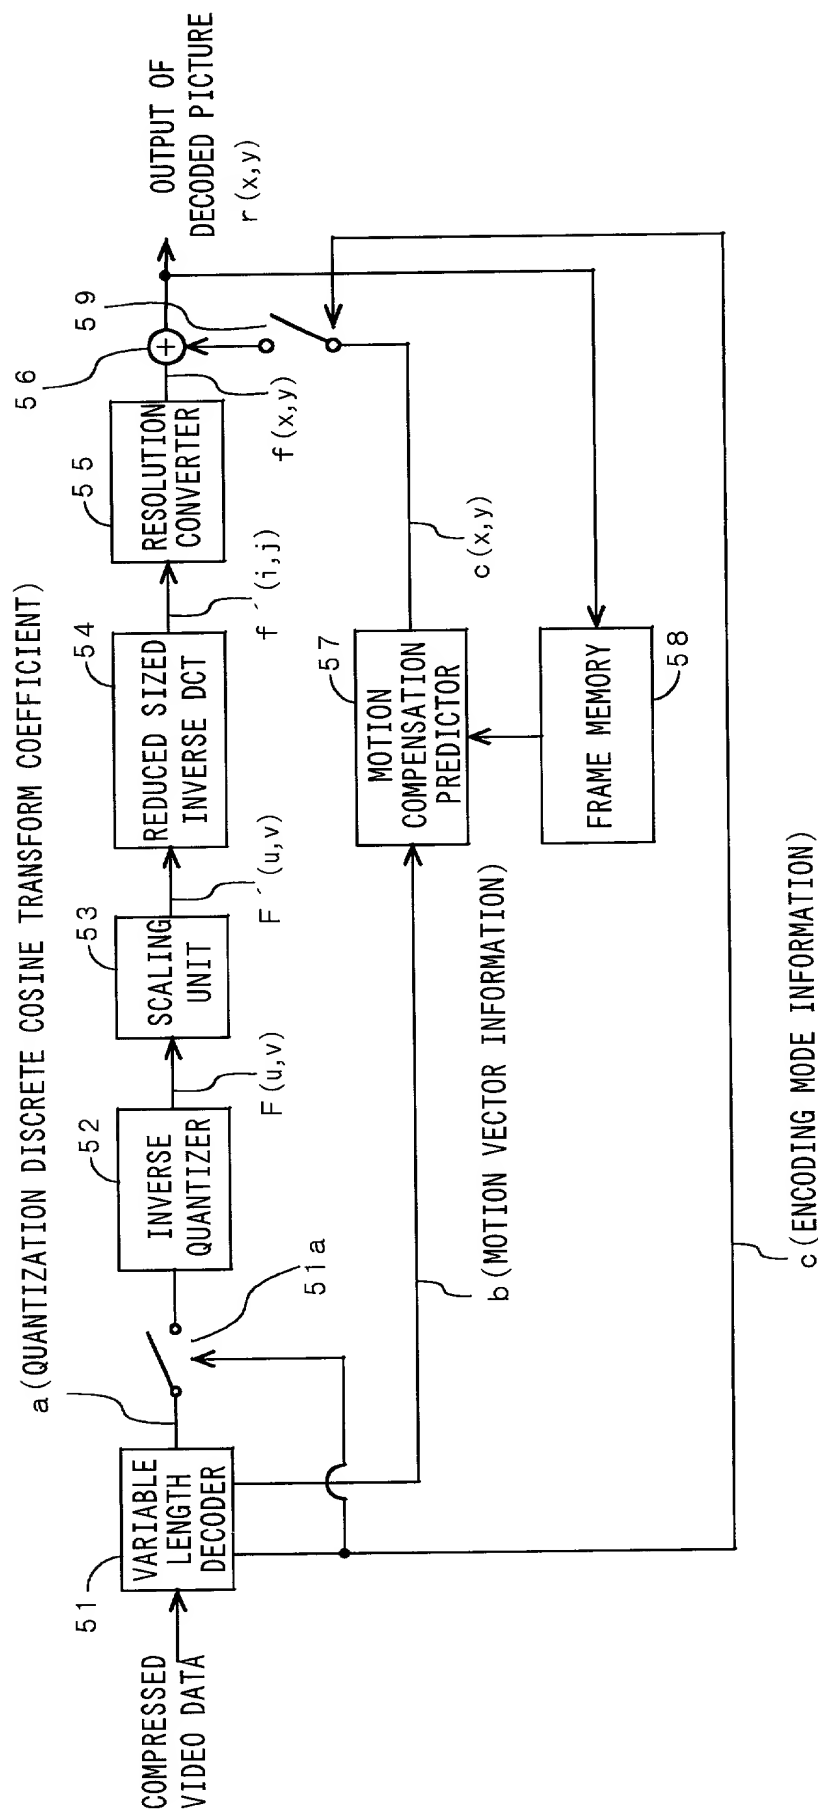


Fig. 20

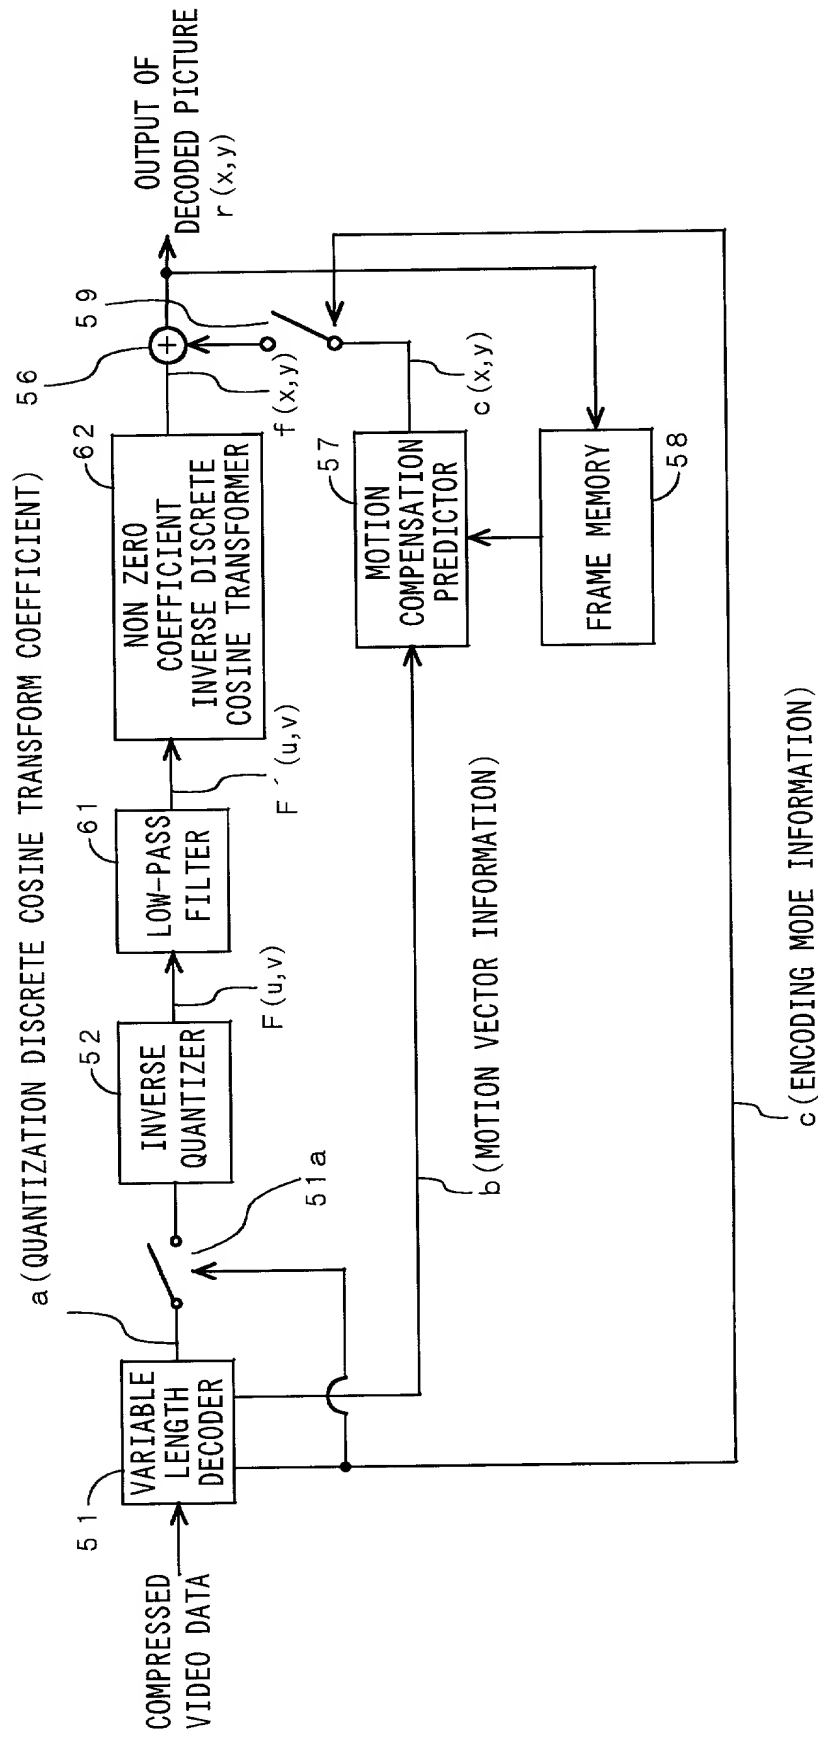


Fig. 21


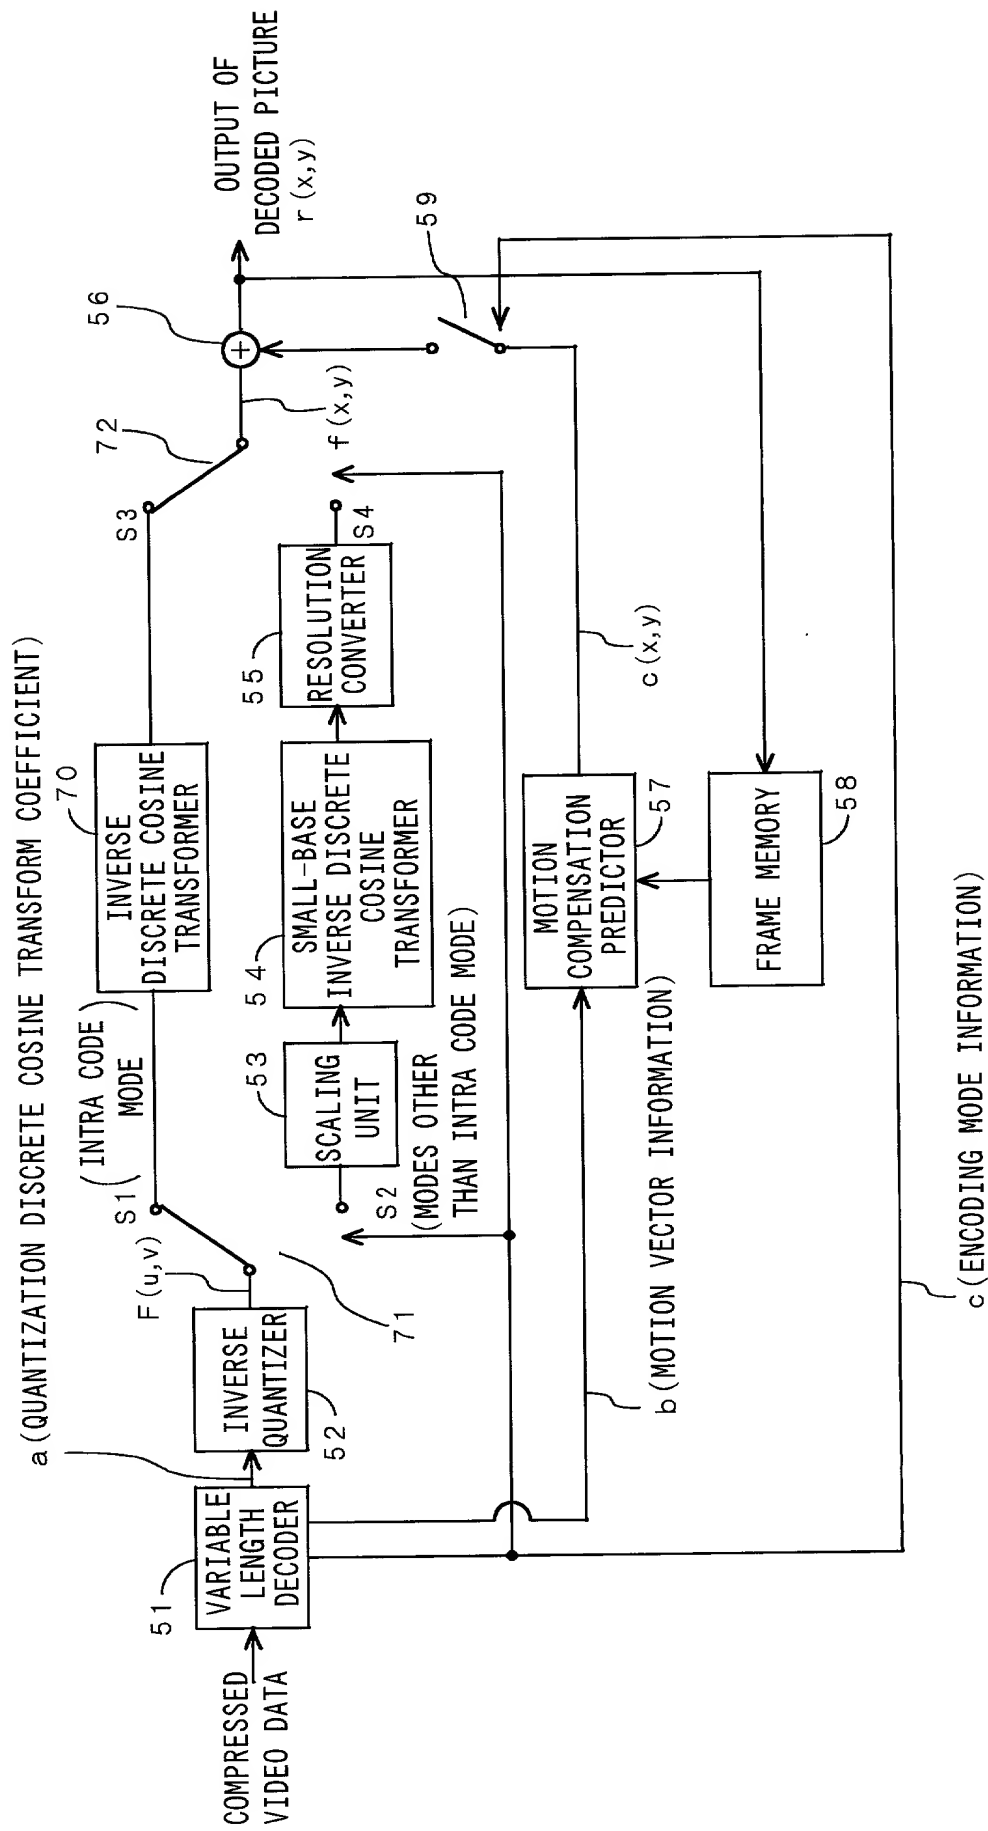


Fig. 22

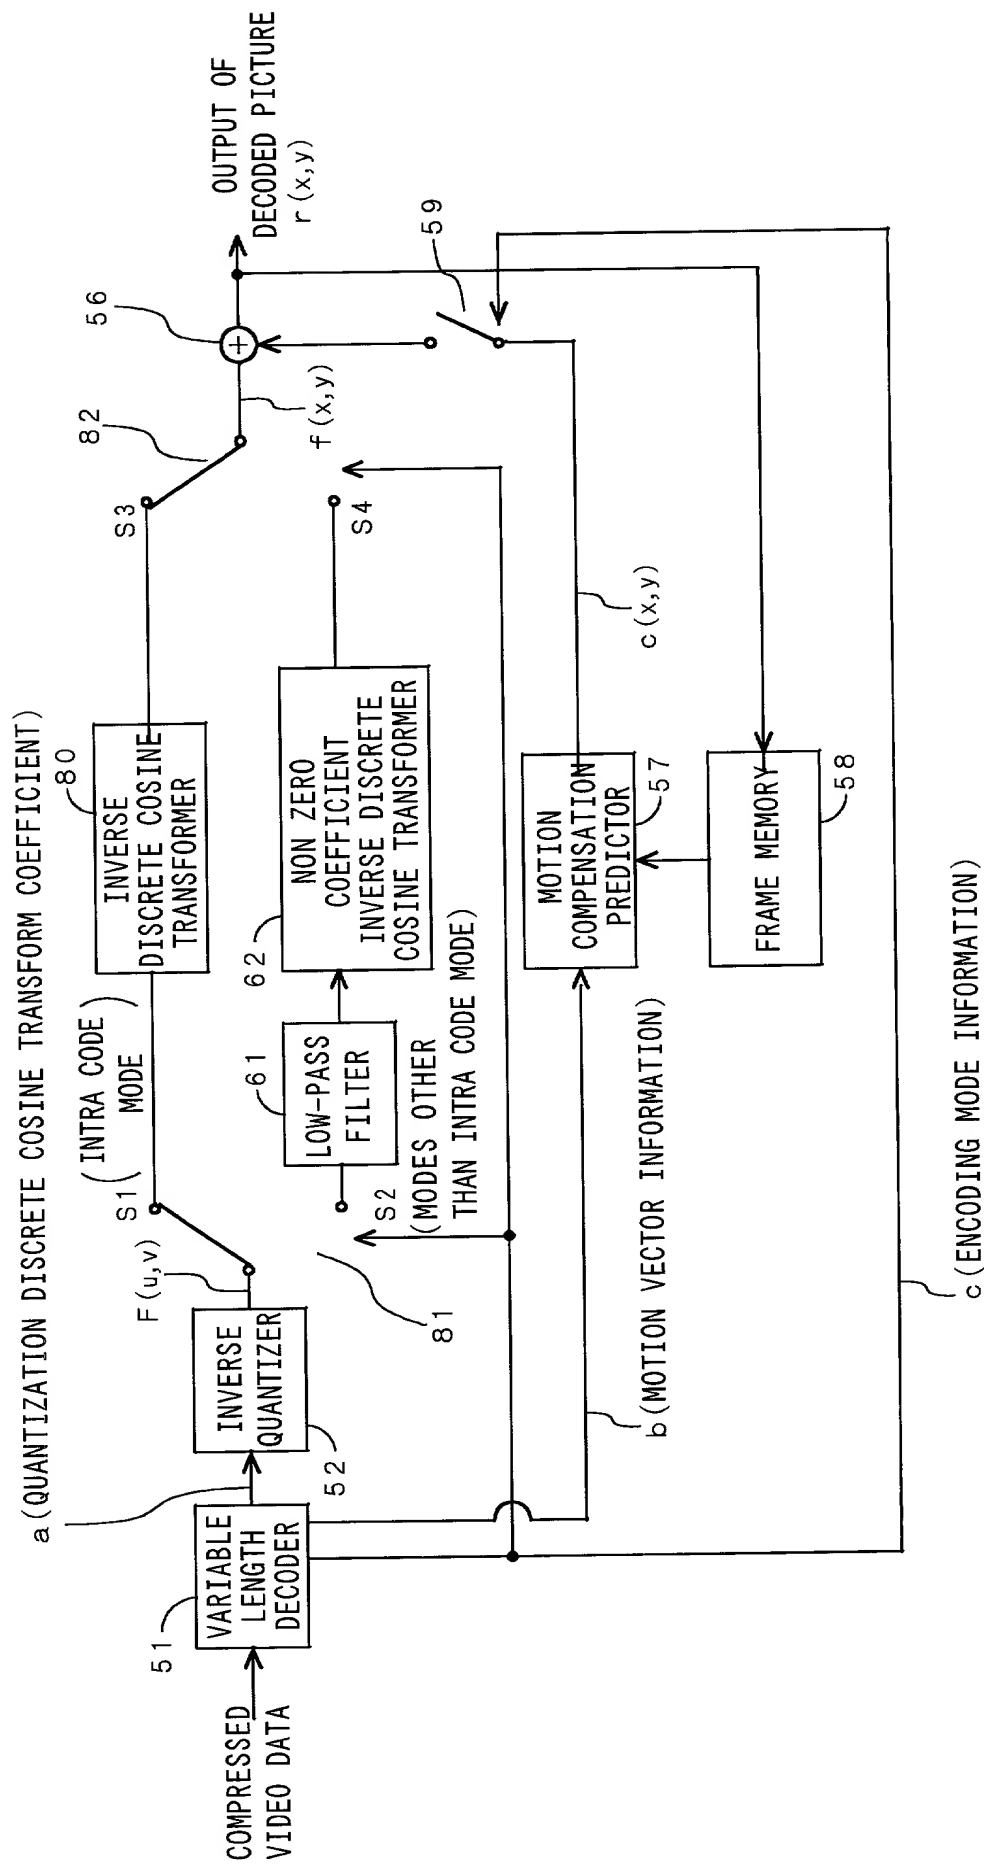

23/29

Fig. 23

$$F^-(u,v)=\frac{F(u,v)}{\left(2^{p_1/2}\cos\frac{u\pi}{4N/2}\cdot\cos\frac{u\pi}{4N/2^2}\cdots\cos\frac{u\pi}{4N/2^{p_1}}\right)\left(2^{p_2/2}\cos\frac{v\pi}{4N/2}\cdot\cos\frac{v\pi}{4N/2^2}\cdots\cos\frac{v\pi}{4N/2^{p_2}}\right)}\cdots(15)$$

$$f(x,y)=\frac{2}{N}\sum_{u=0}^{b_1-1}\sum_{v=0}^{b_2-1}C(u)C(v)F(u,v)\cos\frac{(2x+1)u\pi}{2N}\cos\frac{(2y+1)v\pi}{2N}\cdots(29)$$

$$C(p)=\begin{cases}1/\sqrt{2}&p=0\\1&p\neq0\end{cases}\cdots(30)$$

$$C_a^b=\cos\left(\frac{a\pi}{b}\right)\cdots(31)$$

Fig. 24A

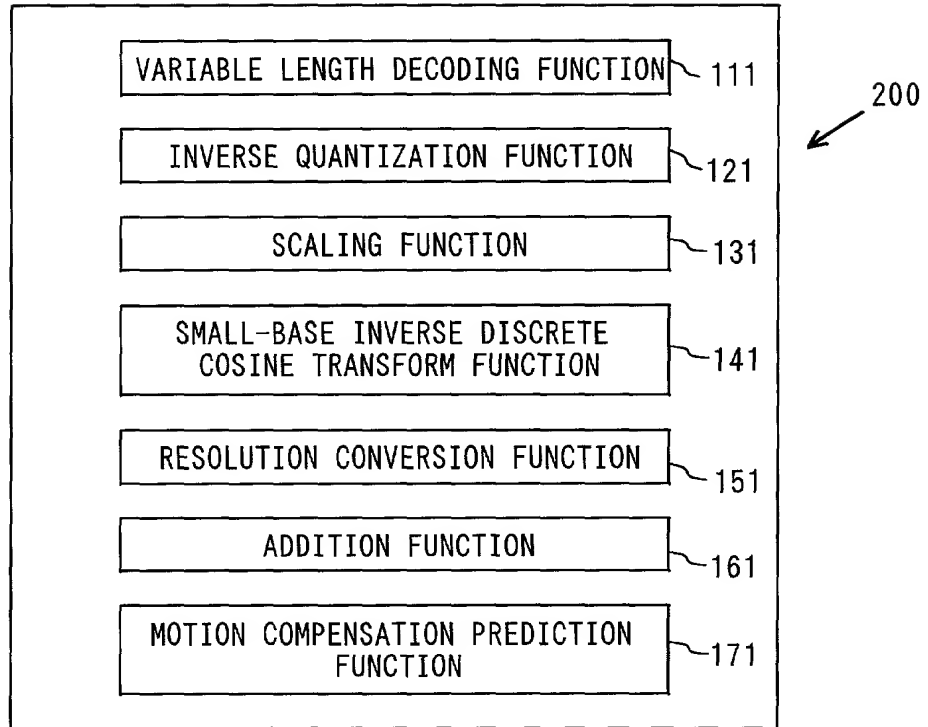


Fig. 24B

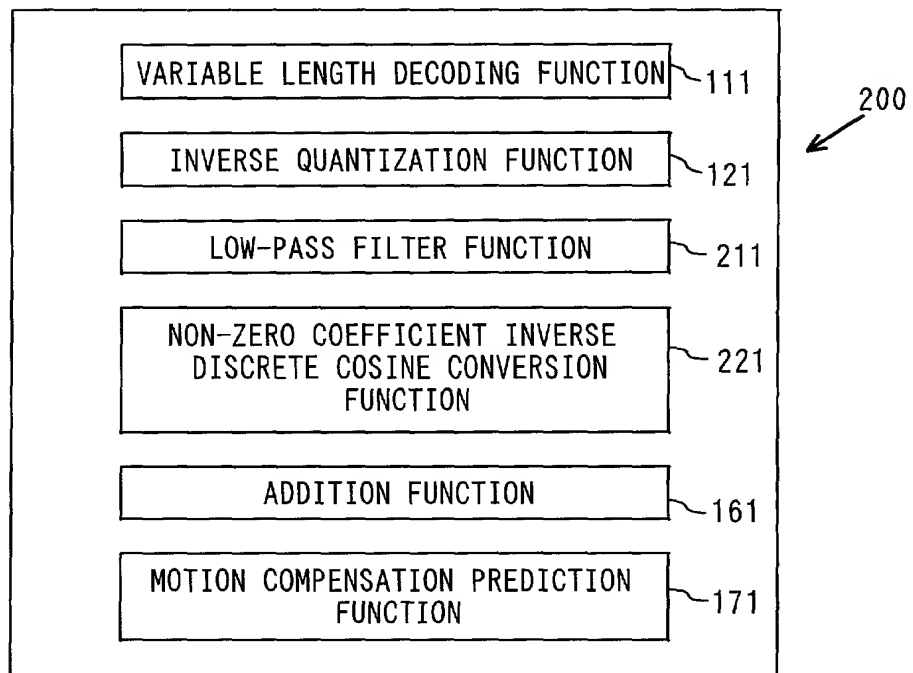


Fig. 25


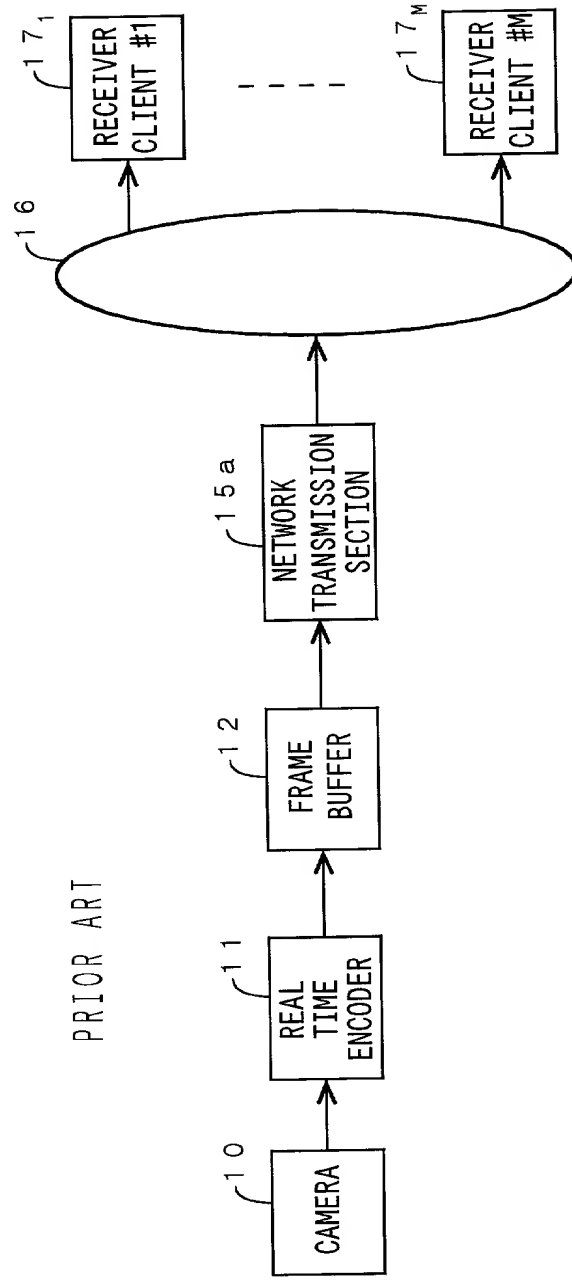


Fig. 26

PRIOR ART

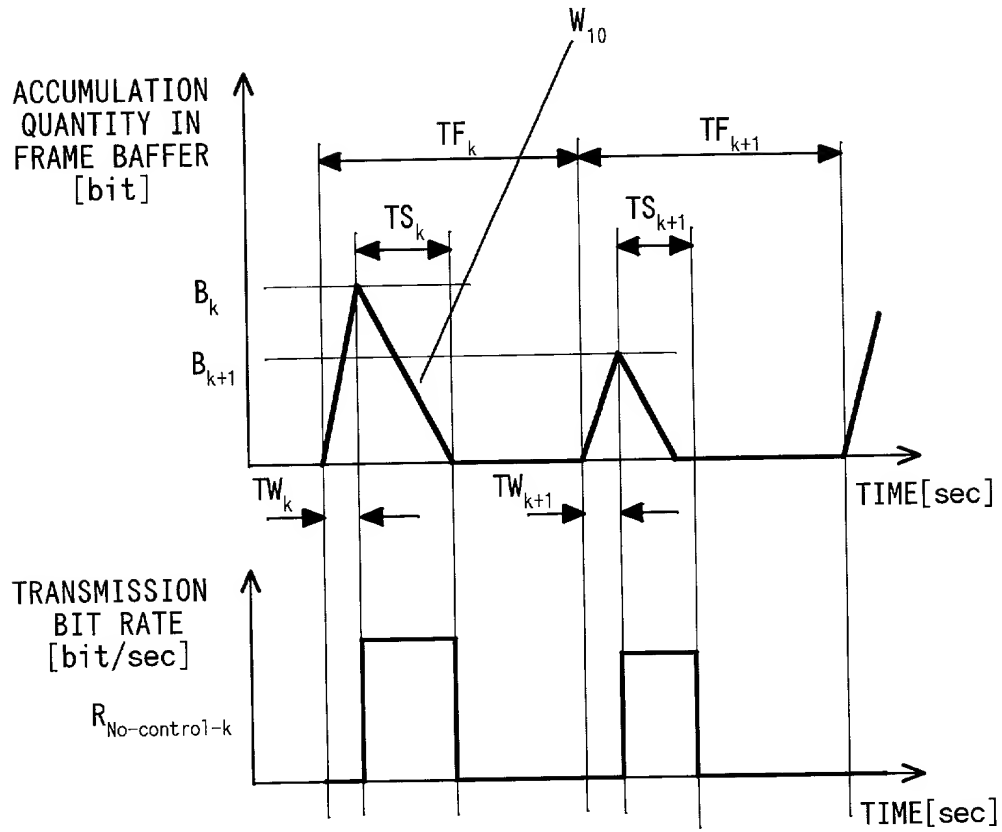

27 / 29

Fig. 27

PRIOR ART

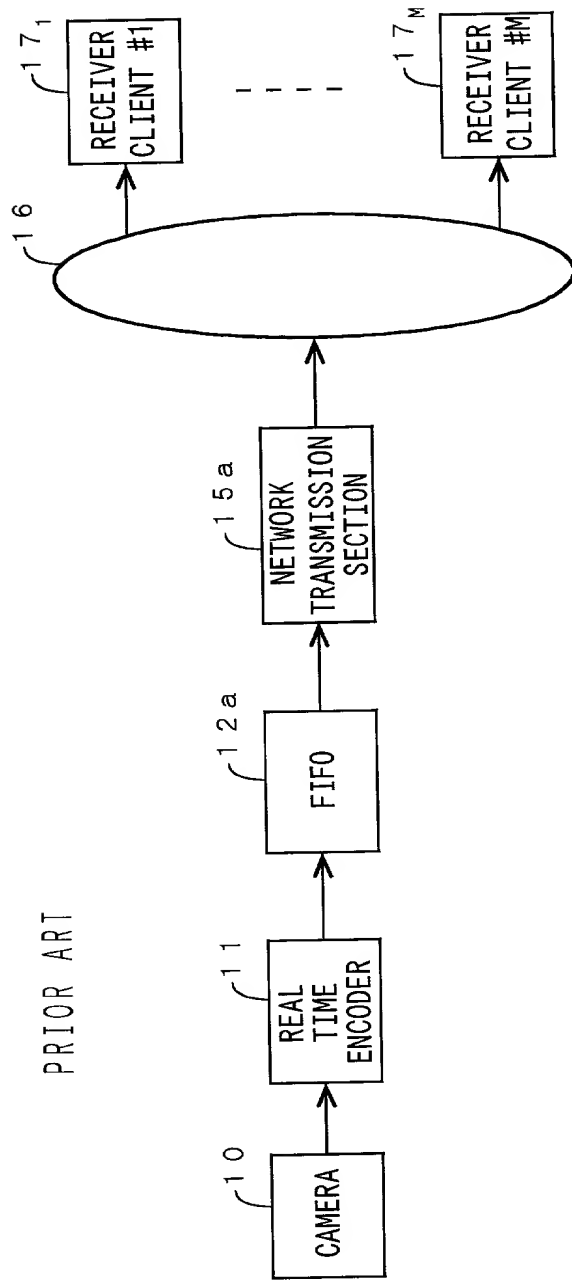


Fig. 28

PRIOR ART


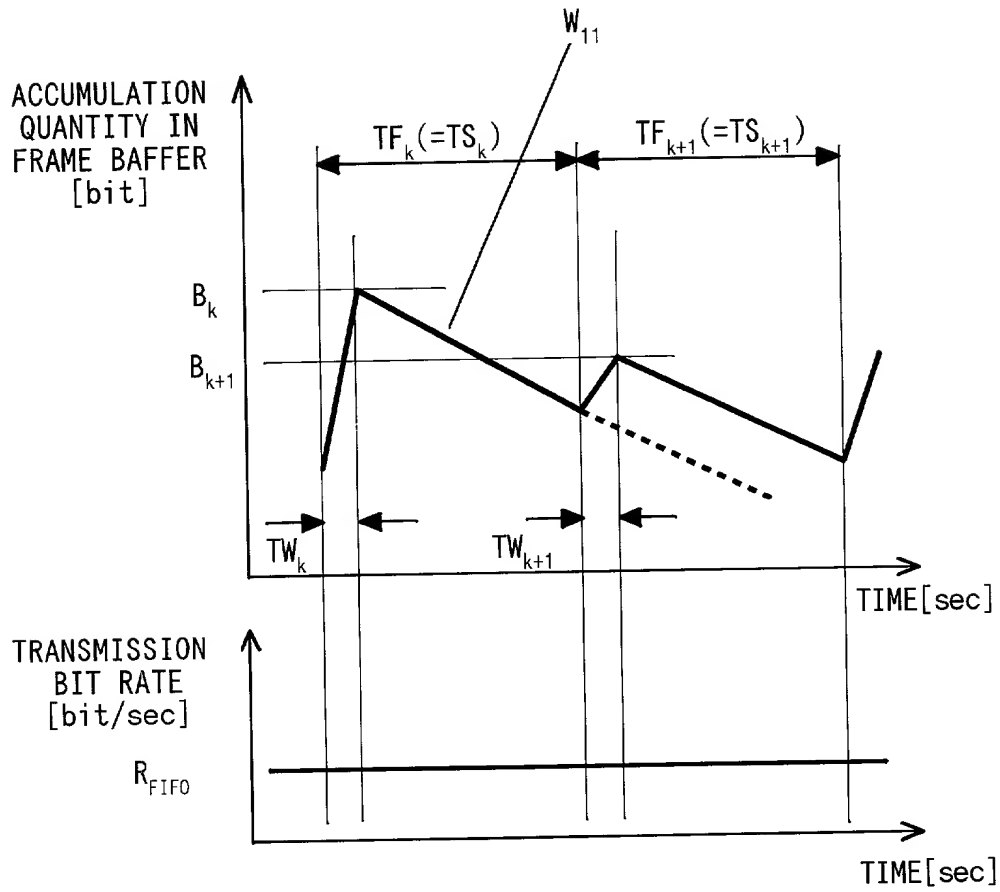


Fig. 29

PRIOR ART

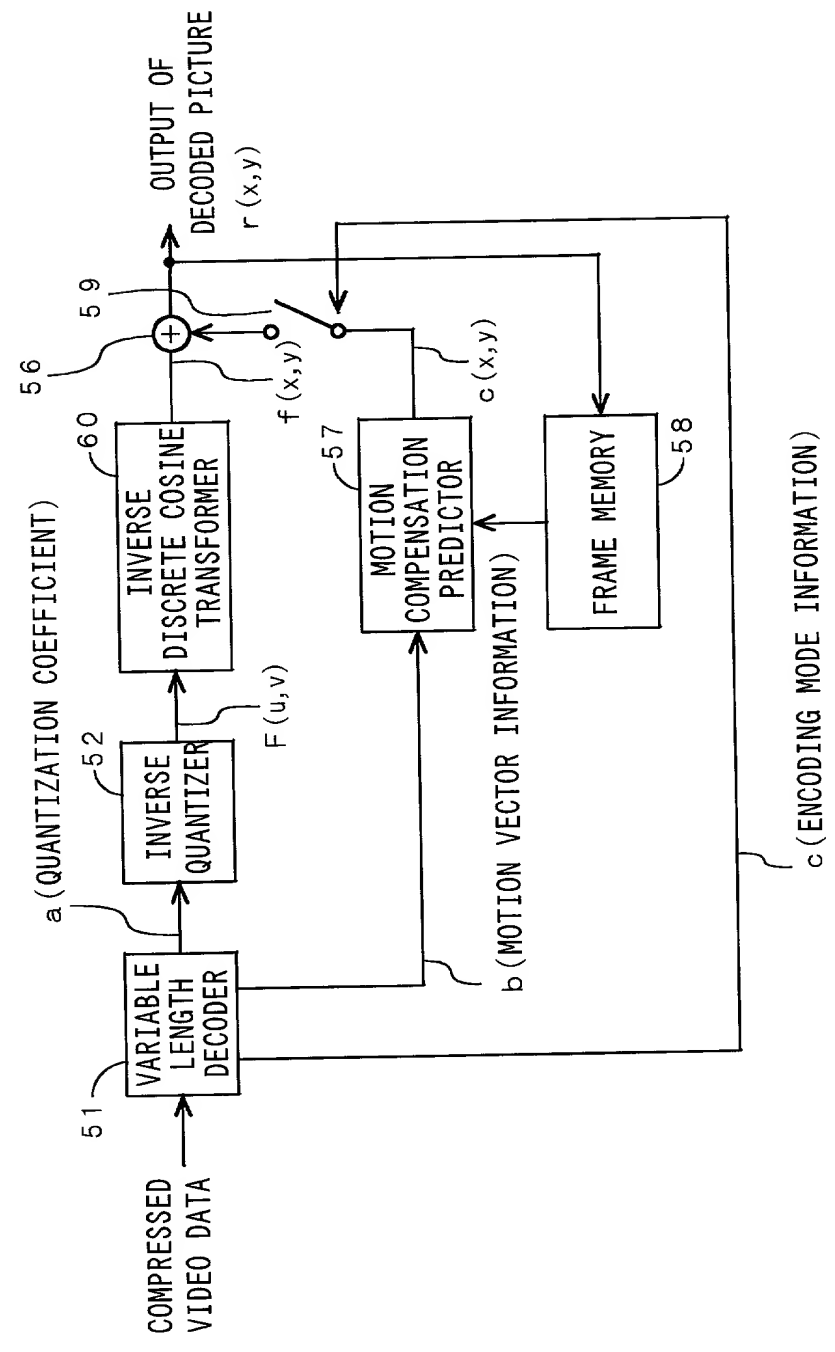

Declaration For U.S. Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention **entitled** (Insert Title) APPARATUS AND METHOD FOR COMPRESSION-TRANSMITTING AND DECODING
- PICTURE INFORMATION AND STORAGE MEDIUM STORED ITS CONTROL PROGRAMS
 the specification of which is attached hereto unless the following is checked:



was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 (a) - (d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

(List prior foreign applications. See note A on back of this page)	257553/99	Japan	10/09/99	Priority Claimed
	(Number)	(Country)	(Day/Month/Year Filed)	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
	265780/99	Japan	20/09/99	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
	(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
	(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
	(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No

(See note B on back of this page)

☐ See attached list for additional prior foreign applications

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

_____ (Application Number)	_____ (Filing Date)
_____ (Application Number)	_____ (Filing Date)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of the application:

(List Prior U.S. Applications)	_____ (Application Serial Number)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
	_____ (Application Serial Number)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

James E. Armstrong, III, Reg. No. 18,366; William F. Westerman, Reg. No. 29,988; Ken-Ichi Hattori, Reg. No. 32,861; Le-Nhung McLeland, Reg. No. 31,541; Ronald F. Naughton, Reg. No. 24,616; John R. Pegan, Reg. No. 18,069; William G. Kratz, Jr., Reg. No. 22,631; Albert Tockman, Reg. No. 19,722; Mel R. Quintos, Reg. No. 31,898; Donald W. Hanson, Reg. No. 27,133; Stephen G. Adrian, Reg. No. 32,878; William L. Brooks, Reg. No. 34,129; John F. Carney, Reg. No. 20,276; Edward F. Welsh, Reg. No. 22,455; Patrick D. Muir, Reg. No. 37,403; Gay A. Spahn, Reg. No. 34,978; and John P. Kong, Reg. No. 40,054.

Please direct all communications to the following address:

ARMSTRONG, WESTERMAN, HATTORI,
McLELAND & NAUGHTON
1725 K Street, N.W., Suite 1000
Washington, D.C. 20006
Telephone: (202) 659-2930 Fax: (202) 887-0357

*I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18 of the United States Code, § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(See note
C above)

Full name of sole or first inventor (given name, family name) Yasuyuki NAKAJIMA
Inventor's Signature *Yasuyuki Nakajima* Date August 25, 2000
Residence Saitama, Japan Citizenship Japan
Post Office Address 32-24, Shiba-nakata 1-chome, Kawaguchi-shi, Saitama, Japan

Full name of second inventor (given name, family name) Hiromasa YANAGIHARA
Inventor's Signature *Hiromasa Yanagihara* Date August 25, 2000
Residence Saitama, Japan Citizenship Japan
Post Office Address 41-2-C203, Toro-cho 1-chome, Omiya-shi, Saitama, Japan

Full name of third inventor (given name, family name) Akio YONEYAMA
Inventor's Signature *Akio Yoneyama* Date August 25, 2000
Residence Tokyo, Japan Citizenship Japan
Post Office Address 18-21, Shinmachi 5-chome, Hoya-shi, Tokyo, Japan

Full name of fourth inventor (given name, family name) Masaru SUGANO
Inventor's Signature *Masaru Sugano* Date August 25, 2000
Residence Tokyo, Japan Citizenship Japan
Post Office Address 21-2-507, Ichigaya-tamachi 2-chome, Shinjuku-ku, Tokyo, Japan

Full name of fifth inventor (given name, family name) _____
Inventor's Signature _____ Date _____
Residence _____ Citizenship _____
Post Office Address _____

Full name of sixth inventor (given name, family name) _____
Inventor's Signature _____ Date _____
Residence _____ Citizenship _____
Post Office Address _____

Full name of seventh inventor (given name, family name) _____
Inventor's Signature _____ Date _____
Residence _____ Citizenship _____
Post Office Address _____

Full name of eighth inventor (given name, family name) _____
Inventor's Signature _____ Date _____
Residence _____ Citizenship _____
Post Office Address _____